


LED Lighting

for Marine & RV



LED Bulbs

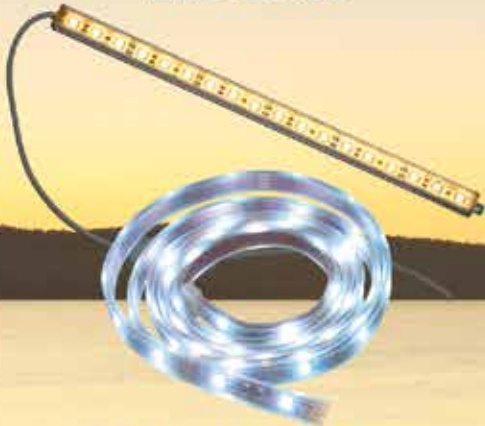

LED Strip Lighting



LED Underwater Lighting



LED Flood Lights



**Drain Plug
LED w/ Quick
Disconnect**



LuxOr
MARINE & RV PRODUCTS 



LEDs last **much longer**
- up to 40,000 hrs

Why choose LuxOr LEDs?

LuxOr LED solid state lamps use as little as one-fifth (1/5) as much power as conventional light bulbs. This reduced demand means you get much more cruising/anchor time between battery re-charging cycles.

Conventional Lighting



LuxOr
MARINE & RV PRODUCTS



Conventional battery power required compared to LuxOr LED powered lighting for the same lighting load

**See the LuxOr LED Difference.
More Power - Longer!**



Typical draw - 4 LuxOr G45-12-WW LED Lamps



Typical draw - 4 - 10W Xenon Halogen Lamps

Never Change a Light Bulb Again

- LuxOr LEDs last much longer - up to 40,000 hrs

Shock and Vibration Resistant

- No filament to break or burn out

Do-It-Yourself

- LuxOr LEDs install just like ordinary light bulbs

Very Little Heat Generated

- Fixtures last longer & air conditioning draw is reduced

Environmentally Friendly

- LuxOr LEDs contain NO mercury

Exceptional Lighting Quality

- Consistent through a range of voltages







- No blinking or flickering

- LuxOr warm white LEDs operate in the same spectrum as incandescent bulbs (2,800k to 3,500k)

- Some LEDs also available in Pure White and Blue

*Note: Cross reference guide offers parts numbers which could be used to replace existing lighting bulbs. The cross reference guide is not an exact equal but bulbs will perform a similar task. Luxor Marine & RV Products is not responsible for errors or omissions and only offers this guide as an aid to selecting the correct lamp. However, we offer a 100% satisfaction guarantee. If the bulb you order does not fit your fixture, we will replace it with one that does. If you are in doubt, to ensure proper selection is made consult sales@luxormarine-rv.ca.

T-10 BASE

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-T10-5HP-WW LED-T10-5HP-PW LED-T10-5HP-BL	○ Warm White	Volts: 12 DC Lumens: 70-75lm View Angle: 360° Watts: 1.0W Length: 28.5mm Diameter: 11.5mm Polarity Sensitive	147, 152, 158, 1459, 161, 168, 184, 192, 193, 194, 259, 280, 285, 447, 464, 555, 558, 585, 655, 656, 657, 1250, 1251, 1252, 2450, 2652, 2921, 2825 Lumens quoted based on Pure White
	○ Pure White		
	● Blue		
 LED-T10-8-WW LED-T10-8-PW LED-T10-8-BL	○ Warm White	Volts: 12 DC Lumens: 25-30lm View Angle: 360° Watts: 0.4-0.5W Length: 22mm Diameter: 11.5mm Polarity Sensitive	147, 152, 158, 1459, 161, 168, 184, 192, 193, 194, 259, 280, 285, 447, 464, 555, 558, 585, 655, 656, 657, 1250, 1251, 1252, 2450, 2652, 2921, 2825 Lumens quoted based on Pure White
	○ Pure White		
	● Blue		
 LED-T10-9HP-WW LED-T10-9HP-BL	○ Warm White	Volts: 12 DC Lumens: 130-135lm View Angle: 360° Watts: 1.6W Length: 34.5mm Diameter: 11.5mm Polarity Sensitive	901, 904, 906, 908, 909, 912, 914, 915, 916, 917, 918, 920, 921, 922, 923, 926, 927, 928, 939 Lumens quoted based on Pure White
	● Blue		
 LED-T10-12HP-WW LED-T10-12HP-PW	○ Warm White	Volts: 10-30 DC Lumens: 120-140lm View Angle: 120-130° Watts: 2.0W Length: 31.5mm Diameter: 11.0mm NON-polarity Sensitive	901, 904, 906, 908, 909, 912, 914, 915, 916, 917, 918, 920, 921, 922, 923, 926, 927, 928, 939 Lumens quoted based on Pure White
	○ Pure White		
 LED-T10-13HP-WW	○ Warm White	Volts: 12 DC Lumens: 180-190lm View Angle: 360° Watts: 3.1W Length: 41.5mm Diameter: 11.5mm Polarity Sensitive	901, 904, 906, 908, 909, 912, 914, 915, 916, 917, 918, 920, 921, 922, 923, 926, 927, 928, 939, 3156
 LED-T10-25-WW	○ Warm White	Volts: 12 DC Lumens: 80-90lm View Angle: 360° Watts: 1.5-1.6W Length: 37mm Diameter: 12.5mm Polarity Sensitive	901, 904, 906, 908, 909, 912, 914, 915, 916, 917, 918, 920, 921, 922, 923, 926, 927, 928, 939, 3156

Three things you really need to know about buying LEDs

1. Lumen Output? A Lumen is the unit of measure used to calculate how much any light bulb puts out. The higher the Lumens, the brighter the light. This information is important when judging the quality of an LED.
2. Converting to LEDs is as easy as changing bulbs! LuxOr LED bulbs will fit your existing fixtures and include a 2-year warranty. Satisfaction Guaranteed!
3. How do You Calculate Life and Reliability? Life and reliability of a LED is dependant on the quality of materials used and the operating temperature of the system. Premium quality LEDs such as the ones sold by LuxOr, are designed to be cool operating, thus extending the lamp life. LuxOr LED's are rated for up to 40,000 hours of life.

Changing to LED is EASY!



Remove the old bulb



Install the new LuxOr LED

LuxOr LED bulbs will fit your existing fixtures.

2-YEAR WARRANTY. SATISFACTION GUARANTEED!

G4 BASE BULBS



All LuxOr G4 bulbs are 10-30 volt DC and NON-polarity Sensitive

G4 Features

- Products are CE and Rohs certified
- Lamps are lead and mercury free
- No UV output
- Zero RF emission with surface mount device design

- LuxOr lamps are designed to minimize EMI by utilizing a specially designed PCB layouts which avoid tracks acting as antenna's that radiate EMI (Electromagnetic interference)
- LuxOr G4 design incorporates Transient suppressor and fuse (self re-setting electronic fuse) which provides extra protection against current overload and voltage spikes. This ensures maximum amp life.

G4 BASE - SIDE PIN

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-G4S-6-WW LED-G4S-6-PW LED-G4S-6-BL	○ Warm White	Volts: 10-30 DC Lumens: WW: 135lm PW: 137lm Blue: 31lm View Angle: 120-130° Watts: 1.0W Diameter: 24mm Thickness: 9mm	12, 91, 891, Q5/T3/CL JC Type G4 Base Lumen output equivalent to a 5w halogen bulb
	○ Pure White		
	● Blue		
 LED-G4S-9-WW LED-G4S-9-PW LED-G4S-9-BL	○ Warm White	Volts: 10-30 DC Lumens: WW: 187lm PW: 192lm Blue: 46lm View Angle: 120-130° Watts: 1.6W Diameter: 28mm Thickness: 9mm	12, 91, 891, Q5/T3/CL, Q10/T3/CL
	○ Pure White		
	● Blue		
 LED-G4S-12-WW LED-G4S-12-PW LED-G4S-12-BL	○ Warm White	Volts: 10-30 DC Lumens: WW: 268lm PW: 277lm Blue: 65lm View Angle: 120-130° Watts: 2.2W Diameter: 31.5mm Thickness: 9mm	12, 91, 891, Q5/T3/CL, Q10/T3/CL Lumen output equivalent to a 10w halogen bulb
	○ Pure White		
	● Blue		


G4 BASE - BACK PIN


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-G4B-6-WW LED-G4B-6-PW	○ Warm White	Volts: 10-30 DC Lumens: WW: 135lm PW: 137lm Blue: 31lm View Angle: 120-130° Watts: 1.0W Diameter: 24mm Thickness: 9mm	12, 91, 891, Q5/T3/CL Lumen output equivalent to a 5w halogen bulb
	○ Pure White		
 LED-G4B-9-WW LED-G4B-9-PW	○ Warm White	Volts: 10-30 DC Lumens: WW: 187lm PW: 192lm Blue: 46lm View Angle: 120-130° Watts: 1.6W Diameter: 28mm Thickness: 9mm	12, 91, 891, Q5/T3/CL, Q10/T3/CL
	○ Pure White		
 LED-G4B-12-WW LED-G4B-12-PW	○ Warm White	Volts: 10-30 DC Lumens: WW: 268lm PW: 277lm Blue: 65lm View Angle: 120-130° Watts: 2.2W Diameter: 31.5mm Thickness: 9mm	12, 91, 891, Q5/T3/CL, Q10/T3/CL Lumen output equivalent to a 10w halogen bulb
	○ Pure White		

MULTI COLOUR OUTPUT BULBS - G4 BASE


The **dual and tri-colour switching bulbs** offer the boater an opportunity to have a two or three colour replacement bulb that switches colour for different ambiances without the need to change the fixture, install extra switches or add new or additional wiring. Simply replace the bulb and use the existing switch to change the colours.

DUAL COLOUR SWITCHING LED BULBS

	PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-G4S-6PW-3BL	6 Pure White & 3 Blue	Volts: 10 to 30v DC Lumens: PW-123, BL-13lm PW-123, RD-15lm	Number of LEDs: 9 - SMD5050 Can replace a 5w or 10w halogen bulb
	LED-G4S-6PW-3RD	6 Pure White & 3 Red	View Angle: 120° Watts: 0.7w / 1.3w Diameter: 30mm Thickness: 11.4mm	

	PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-G4S-10PW-6BL	10 Pure White & 6 Blue	Volts: 10 to 30v DC Lumens: PW-182, BL-24lm PW-182, RD-27lm	Number of LEDs: 16 - SMD5050 Can replace a 5w or 10w halogen bulb
	LED-G4S-10PW-6RD	10 Pure White & 6 Red	View Angle: 120° Watts: 1.0w / 1.7w Diameter: 33mm Thickness: 11.4mm	

TRI COLOUR SWITCHING LED BULBS

	PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-G4S-6PW-4RD-3BL	6 Pure White, 4 Red & 3 Blue	Volts: 10 to 30v DC Lumens: PW-123, RD-20, BL-13lm View Angle: 120° Watts: PW: 0.7w Red: 0.6w Blue: 0.45w Diameter: 33mm Thickness: 11.5mm	Number of LEDs: 13 - SMD5050 Can replace a 5w or 10w halogen bulb

Above bulbs also available in back pin configurations. Replace the LED-G4S- with LED-G4B- for back pin configuration.


Simply Replace The G4 Bulb - no wiring or special fixtures required.

Dual colour and tri-colour bulbs are not automatic switching.

This is the operating sequence:

Tri-colour Instructions: switch on → red light • switch off and on → pure white light • switch off and switch on → blue light



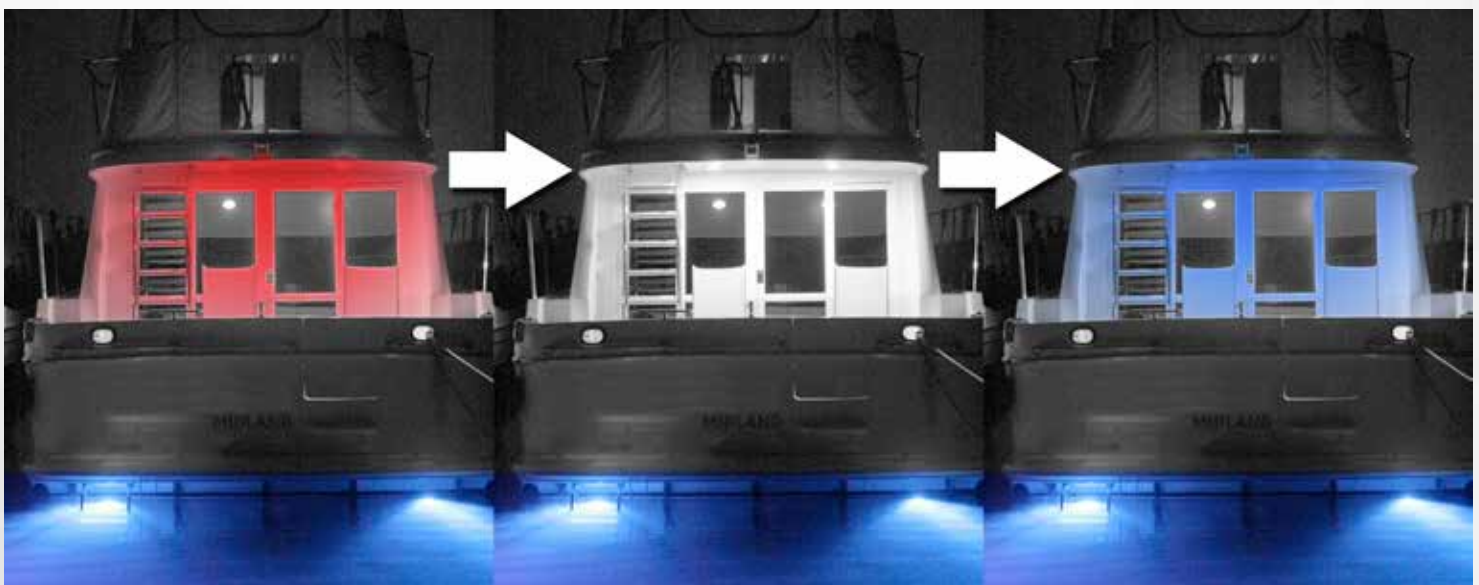



Dual colour instructions: switch on → red light • switch off and on within 1.5 seconds → pure white light • switch off and after 5 seconds, switch on → red light









MULTI LEVEL OUTPUT BULBS - G4 BASE

The **multi level output bulbs** offer boaters the ability to achieve two or three levels of lighting by replacing their standard 5 watt or 10 watt G4 halogen bulb to a LuxOr Marine multi level replacement bulb. Switch between 9 LEDs, to 6 LEDs to 3 LEDs offering you tri level lighting or between 6 LEDs and 3 LEDs for dual level lighting. All this can be done without changing the fixture, installing extra switches or an expensive dimmer switch or add new or additional wiring. Simply remove and install the LuxOr Marine G4 multi level output replacement bulbs.

DUAL LIGHT LEVEL

	PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-G4S-6WW-3WW	<input type="radio"/> Warm White - 6 to 3	Volts: 10 to 30v DC Lumens: WW: 6-129, 3-65lm PW: 6-137, 3-70lm View Angle: 120° Watts: 1.3w / 0.7 w Diameter: 30mm Thickness: 11.4mm	Number of LEDs: 9 - SMD5050 Can replace a 5w or 10w halogen bulb     
	LED-G4S-6PW-3PW	<input type="radio"/> Pure White - 6 to 3		

TRI LIGHT LEVEL

	PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-G4S-9WW-6WW-3WW	<input type="radio"/> Warm White - 9 to 6 to 3	Volts: 10 to 30v DC Lumens: WW: 9-187, 6-129, 3-65lm PW: 9-192, 6-137, 3-70lm View Angle: 120° Watts: 1.9w / 1.3w / 0.7 w Diameter: 30mm Thickness: 11.4mm	Number of LEDs: 13 - SMD5050 Can replace a 5w or 10w halogen bulb     
	LED-G4S-9PW-6PW-3PW	<input type="radio"/> Pure White - 9 to 6 to 3		

Above bulbs also available in back pin configurations. Replace the LED-G4S- with LED-G4B- for back pin configuration.

Simply Replace The G4 Bulb - no wiring or special fixtures required.

Dual level and tri-level bulbs are not automatic switching.
This is the operating sequence:

Tri-level Instructions:

switch on → bright light (9 LEDs) • switch off and on → mid-level light (6 LEDs) • switch off and switch on → low light (3 LEDs)

Dual level instructions:

switch on → mid-level light (6 LEDs) • switch off and on within 1.5 seconds → low light (3 LEDs) • switch off and after 5 seconds, switch on → mid-level light (6 LEDs)



LED TIP: All LuxOr G-4 bulbs are 10-30 volt DC, are NON-polarity sensitive and:

- Have a true Constant Current driver
- Feature 2-layer aluminum PCB for superior heat dissipation
- Use SI-EN33501C which meets CE EMI standard (prevents interference with radio, GPS, etc.)


To maximize life and brightness, we want to drive the LED at its design forward-current, regardless of input voltage and we do not want to over-drive the LED. We utilize an integrated circuit in our Constant Current products, which provides constant current to the bulb from 10-30 volts DC. This ultimately means that the bulb is the same brightness at 10 volts as it is at 30 volts and the LEDs are being protected regardless of the voltage.

FIXTURES - G4 BASE

NEW



SPECIFICATIONS



FEATURES

PS Series is a highly diversified low profile recessed ceiling light fixture, which allows it to fit into many applications. .
 You can also easily coordinate throughout your boat or motor coach.
 Select from a multitude of LED bulb combinations to create the desired lighting ambiance.
 Voltage: 10 - 30v DC
 Mounting: Screws
 Indoor/Dry Location Use Only

SINGLE COLOUR LIGHTS

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-PS-CH-12-WW	○ Warm White - 12	Chrome
LED-PS-CH-12-PW	○ Pure White - 12	Chrome
LED-PS-CH-9-WW	○ Warm White - 9	Chrome
LED-PS-CH-9-PW	○ Pure White - 9	Chrome
LED-PS-CH-6-WW	○ Warm White - 6	Chrome
LED-PS-CH-6-PW	○ Pure White - 6	Chrome
LED-PS-WH-12-WW	○ Warm White - 12	White
LED-PS-WH-12-PW	○ Pure White - 12	White
LED-PS-WH-9-WW	○ Warm White - 9	White
LED-PS-WH-9-PW	○ Pure White - 9	White
LED-PS-WH-6-WW	○ Warm White - 6	White
LED-PS-WH-6-PW	○ Pure White - 6	White

TRI & DUAL LEVEL OUTPUT

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-PS-CH-TL-9-6-3-WW	○ Warm White - 9 to 6 to 3	Chrome
LED-PS-CH-TL-9-6-3-PW	○ Pure White - 9 to 6 to 3	Chrome
LED-PS-WH-TL-9-6-3-WW	○ Warm White - 9 to 6 to 3	White
LED-PS-WH-TL-9-6-3-PW	○ Pure White - 9 to 6 to 3	White
LED-PS-CH-DL-6-3-WW	○ Warm White - 6 to 3	Chrome
LED-PS-CH-DL-6-3-PW	○ Pure White - 6 to 3	Chrome
LED-PS-WH-DL-6-3-WW	○ Warm White - 6 to 3	White
LED-PS-WH-DL-6-3-PW	○ Pure White - 6 to 3	White


MULTI COLOUR OUTPUT

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-PS-CH-TC-6PW-4RD-3BL	9 Pure White - 4 Red - 3 Blue	Chrome
LED-PS-WH-TC-6PW-4RD-3BL	9 Pure White - 4 Red - 3 Blue	White
LED-PS-CH-DC-6PW-3BL	6 Pure White - 3 Blue	Chrome
LED-PS-WH-DC-6PW-3BL	6 Pure White - 3 Blue	White
LED-PS-CH-DC-6PW-3RD	6 Pure White - 3 Red	Chrome
LED-PS-WH-DC-6PW-3RD	6 Pure White - 3 Red	White

NEW



SPECIFICATIONS



FEATURES

NV Series is a highly diversified low profile recessed ceiling light fixture, which allows it to fit into many applications.
 You can also easily coordinate throughout your boat or motor coach.
 Select from a multitude of LED bulb combinations to create the desired lighting ambiance.
 Voltage: 10 - 30v DC
 Mounting: Springs
 Indoor/Dry Location Use Only

SINGLE COLOUR LIGHTS

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-NV-CH-12-WW	○ Warm White - 12	Chrome
LED-NV-CH-12-PW	○ Pure White - 12	Chrome
LED-NV-CH-9-WW	○ Warm White - 9	Chrome
LED-NV-CH-9-PW	○ Pure White - 9	Chrome
LED-NV-CH-6-WW	○ Warm White - 6	Chrome
LED-NV-CH-6-PW	○ Pure White - 6	Chrome
LED-NV-WH-12-WW	○ Warm White - 12	White
LED-NV-WH-12-PW	○ Pure White - 12	White
LED-NV-WH-9-WW	○ Warm White - 9	White
LED-NV-WH-9-PW	○ Pure White - 9	White
LED-NV-WH-6-WW	○ Warm White - 6	White
LED-NV-WH-6-PW	○ Pure White - 6	White

TRI & DUAL LEVEL OUTPUT

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-NV-CH-TL-9-6-3-WW	○ Warm White - 9 to 6 to 3	Chrome
LED-NV-CH-TL-9-6-3-PW	○ Pure White - 9 to 6 to 3	Chrome
LED-NV-WH-TL-9-6-3-WW	○ Warm White - 9 to 6 to 3	White
LED-NV-WH-TL-9-6-3-PW	○ Pure White - 9 to 6 to 3	White
LED-NV-CH-DL-6-3-WW	○ Warm White - 6 to 3	Chrome
LED-NV-CH-DL-6-3-PW	○ Pure White - 6 to 3	Chrome
LED-NV-WH-DL-6-3-WW	○ Warm White - 6 to 3	White
LED-NV-WH-DL-6-3-PW	○ Pure White - 6 to 3	White

MULTI COLOUR OUTPUT

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-NV-CH-TC-6PW-4RD-3BL	9 Pure White - 4 Red - 3 Blue	Chrome
LED-NV-WH-TC-6PW-4RD-3BL	9 Pure White - 4 Red - 3 Blue	White
LED-NV-CH-DC-6PW-3BL	6 Pure White - 3 Blue	Chrome
LED-NV-WH-DC-6PW-3BL	6 Pure White - 3 Blue	White
LED-NV-CH-DC-6PW-3RD	6 Pure White - 3 Red	Chrome
LED-NV-WH-DC-6PW-3RD	6 Pure White - 3 Red	White

FESTOON BASE

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES	
 LED-FEST-31-2HP-WW LED-FEST-31-2HP-PW LED-FEST-31-2HP-BL	○ Warm White ○ Pure White ● Blue	Volts: 12 DC Lumens: 25-30lm View Angle: 120-150° Watts: 0.6W Length: 31mm Diameter: 8mm Polarity Sensitive	3021, 3022, 3175, 6428, 6430, DE3175 Lumens quoted based on Pure White	
	 LED-FEST-31-4HP-WW LED-FEST-31-4HP-PW LED-FEST-31-4HP-BL	○ Warm White ○ Pure White ● Blue	Volts: 12 DC Lumens: 35-40lm View Angle: 360° Watts: 1.0W Length: 31mm Diameter: 11mm Polarity Sensitive	3021, 3022, 3175, 6428, 6430, DE3175 Lumens quoted based on Pure White
		 LED-FEST-36-8HP-WW LED-FEST-36-8HP-PW LED-FEST-36-8HP-BL	○ Warm White ○ Pure White ● Blue	Volts: 12 DC Lumens: 80-90lm View Angle: 360° Watts: 1.9W Length: 36mm Diameter: 11.5mm Polarity Sensitive
 LED-FEST-36-3HP-WW LED-FEST-36-3HP-PW LED-FEST-36-3HP-BL			○ Warm White ○ Pure White ● Blue	Volts: 12 DC Lumens: 40-45lm View Angle: 120-150° Watts: 0.8W Length: 36mm Diameter: 8mm Polarity Sensitive
	 LED-FEST-39-3HP-WW LED-FEST-39-3HP-PW LED-FEST-39-3HP-BL		○ Warm White ○ Pure White ● Blue	Volts: 12 DC Lumens: 40-45lm View Angle: 120-150° Watts: 0.8W Length: 39mm Diameter: 8mm Polarity Sensitive
		 LED-FEST-39-6HP-WW LED-FEST-39-6HP-PW LED-FEST-39-6HP-BL	○ Warm White ○ Pure White ● Blue	Volts: 12 DC Lumens: 80-90lm View Angle: 120-150° Watts: 1.3W Length: 39mm Diameter: 16.5mm Polarity Sensitive
 LED-FEST-42-6HP-WW LED-FEST-42-6HP-PW LED-FEST-42-6HP-BL			○ Warm White ○ Pure White ● Blue	Volts: 10 to 30v DC Lumens: WW-96lm PW-102lm Blue-31lm View Angle: 120-150° Watts: 1.0W Length: 42mm Diameter: 16.5mm Non Polarity Sensitive

FESTOON BASE

NEW



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
LED-FEST42-9HP-WW	○ Warm White	Volts: 10 to 30v DC	211, 212-2, 214-2, 4411, 6411, 6413, 6429
LED-FEST42-9HP-PW	○ Pure White	Lumens: WW-170lm PW-179lm Blue-46lm	
LED-FEST42-9HP-BL	● Blue	View Angle: 180° Watts: 1.6W Length: 42mm Width: 27mm Non Polarity Sensitive	



NEW



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-FEST31-8-WW	○ Warm White	Volts: 10 to 30v DC	Number of LEDs: 8 - SMD3528
LED-FEST31-8-PW	○ Pure White	Lumens: WW - 66lm PW - 70lm	
		View Angle: 360° Watts: 0.7w Diameter: 13mm Length: 31mm Non Polarity Sensitive	



NEW



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-FEST42-12-WW	○ Warm White	Volts: 10 to 30v DC	Number of LEDs: 12 - SMD3528
LED-FEST42-12-PW	○ Pure White	Lumens: WW - 80lm PW - 90lm	
		View Angle: 360° Watts: 1.0w Diameter: 13mm Length: 42mm Non Polarity Sensitive	



NEW



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-FEST42B-12-WW	○ Warm White	Volts: 10 to 30v DC	Number of LEDs: 12 - SMD3528 Barrel Type LED 42mm Aqua Signal Type Dimpled Barrel End Festoon
LED-FEST42B-12-PW	○ Pure White	Lumens: WW - 80lm PW - 90lm	
		View Angle: 360° Watts: 1.0w Diameter: 13mm Length: 42mm Non Polarity Sensitive	



NEW



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-FEST42-30-WW	○ Warm White	Volts: 10 to 30v DC	Number of LEDs: 30 - SMD3528
LED-FEST42-30-PW	○ Pure White	Lumens: WW - 160lm PW - 165lm	
		View Angle: 360° Watts: 1.8w Diameter: 22mm Length: 42mm Non Polarity Sensitive	



NEW



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-FEST42B-30-WW	○ Warm White	Volts: 10 to 30v DC	Number of LEDs: 30 - SMD3528 Barrel Type LED 42mm Aqua Signal Type Dimpled Barrel End Festoon
LED-FEST42B-30-PW	○ Pure White	Lumens: WW - 160lm PW - 165lm	
		View Angle: 360° Watts: 1.8w Diameter: 22mm Length: 42mm Non Polarity Sensitive	



The USCG and other maritime testing agencies currently do not certify individual replacement LED bulbs by themselves or otherwise. At present only complete fixtures with bulbs are tested and certified against the Colreg requirements, While our LED bulbs are the brightest LED bulbs available, the operator of vessel assumes all liability when using this product as a replacement for the original light source.






LED TIP: Colour & Quality of the Light - The colour of light is measured in "Degrees Kelvin". "White" light ranges from 3,000K (warm or towards the red end of the colour spectrum) to 5,000K (cold - towards the blue end of the colour spectrum). LuxOr provides a premium LED package designed to replace your existing halogen, xenon or incandescent bulbs with colour temperatures in the 3,000K range, the warm white end of the colour spectrum. This warm white light brings out the richness of colour and enhances skin tone. While a 5,000K lamp looks brighter (pure white), it will change the colour and appearance of your décor, which may defeat the effect you are trying to achieve.






BAYONET BASE






Note: Bayonet Base Pin Orientation




Single-contact and most double-contact bulbs are Parallel Pin (BA15S/BA15D). Some double-contact bulbs are Indexed Pin (BAY15D).











PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BAY15D-6-WW LED-BAY15D-6-PW LED-BAY15D-6-BL	○ Warm White	Volts: 10-14.5 DC Lumens: 12-15lm View Angle: 120-150° Watts: 0.24-0.26W Length: 23mm Diameter: 11.5mm	 756, 1813, 1815, 1889, 1891, 1892, 1893, 1895 
	● Blue		






PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BAY15D-6-WW LED-BAY15D-6-PW LED-BAY15D-6-BL	○ Warm White	Volts: 10-30 DC Lumens: 80lm View Angle: 120-130° Watts: 1.0-1.2W Length: 38mm Diameter: 26mm NON-polarity Sensitive	 LED-BAY15D-6-WW (Parallel): 1003, 1073, 1141, 1195  LED-BAY15D-6-WW (Parallel): 68, 82, 90, 94, 1004, 1076, 1142  LED-BAY15D-6-WW (Indexed Single Intensity): 1157 
	○ Warm White		
	○ Warm White		

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BAY15D-9-WW LED-BAY15D-9-PW LED-BAY15D-9-BL LED-BAY15D-9-WW LED-BAY15D-9-PW LED-BAY15D-9-BL LED-BAY15D-9-WW	○ Warm White	Volts: 10-14.5 DC Lumens: 36-40lm View Angle: 120-150° Watts: 0.48W Length: 34mm Diameter: 19mm NON-polarity Sensitive	 LED-BAY15D-9-WW / LED-BAY15D-9-BL (Parallel): 1003, 1073, 1141, 1195  LED-BAY15D-9-WW / LED-BAY15D-9-BL (Parallel): 68, 90, 1004, 1142, 1176  LED-BAY15D-9-WW / LED-BAY15D-9-BL (Indexed Single Intensity): 1157 
	○ Pure White		
	● Blue		
	○ Warm White		
	○ Pure White		
	● Blue		
	○ Warm White		

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BAY15D-8-WW LED-BAY15D-8-PW LED-BAY15D-8-BL	○ Warm White	Volts: 10-30 DC Lumens: 120lm View Angle: 360° Watts: 1.2W Length: 37.5mm Diameter: 18.5mm NON-polarity Sensitive	 LED-BAY15D-8-WW (Parallel): 1141 
	○ Warm White		
	○ Warm White		

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BAY15D-13-WW LED-BAY15D-13-PW LED-BAY15D-13-BL LED-BAY15D-13-WW LED-BAY15D-13-PW	○ Warm White	Volts: 10-30 DC Lumens: 195lm View Angle: 360° Watts: 2.9W Length: 41.5mm Diameter: 18.5mm NON-polarity Sensitive	 LED-BAY15D-13-WW (Parallel): 1003 
	○ Pure White		
	○ Warm White		
	○ Pure White		
	○ Warm White		

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BAY15D-18-WW LED-BAY15D-18-PW LED-BAY15D-18-BL LED-BAY15D-18-WW LED-BAY15D-18-PW	○ Warm White	Volts: 10-30 DC Lumens: 270lm View Angle: 360° Watts: 3.5W Length: 54.5mm Diameter: 23mm NON-polarity Sensitive	 LED-BAY15D-18-WW (Parallel): 93, 1073, 1093, 1129, 1141, 1147, 1156, 1159, 1295, 1295NA, 1459, 1619, 1651, 1680, 2396, 3497, 7506, 7527  LED-BAY15D-18-WW (Parallel): 68, 82, 90, 1004, 1076, 1142  LED-BAY15D-18-WW (Indexed Single Intensity): 1157 
	○ Pure White		
	○ Warm White		
	○ Pure White		
	○ Warm White		

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BAY15D-27-WW LED-BAY15D-27-PW LED-BAY15D-27-BL LED-BAY15D-27-WW LED-BAY15D-27-PW LED-BAY15D-27-BL	○ Warm White	Volts: 10-30 DC Lumens: 405lm View Angle: 360° Watts: 4.1W Length: 54.5mm Diameter: 23mm NON-polarity Sensitive	 LED-BAY15D-27-WW (Parallel): 93, 1073, 1093, 1129, 1141, 1147, 1156, 1159, 1295, 1295NA, 1459, 1619, 1651, 1680, 2396, 3497, 7506, 7527  LED-BAY15D-27-WW (Parallel): 68, 82, 90, 1004, 1076, 1142  LED-BAY15D-27-WW (Indexed Single Intensity): 1157 
	○ Pure White		
	○ Warm White		
	○ Pure White		
	○ Warm White		
	○ Pure White		

BAYONET BASE

PART NUMBER	FEATURES
SA-E26-BA15D	E26 screw in lamp socket to convert to double contact bayonet base socket.



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
LED-BAY15D-DC-RG	Red & Green	Volts: 10 to 30v DC View Angle: 360° Watts: 4.3W Diameter: 35mm Length: 67.6mm Non Polarity Sensitive	LED-BAY15D-DC-RG (Indexed Single Intensity): 1157

NEW



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
LED-BAY15D-TC-RGW	Red, Green & White	Volts: 10 to 30v DC View Angle: 360° Watts: 3.9W Diameter: 35mm Length: 67.6mm Non Polarity Sensitive	LED-BAY15D-TC-RGW (Indexed Single Intensity): 1157

NEW



SENSOR LED BULB

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-BAY15D-SL18-PW	Pure White	Volts: 10 to 30v DC Lumens: 271lm View Angle: 360° Watts: 2.4w Diameter: 23.5mm Length: 53.5mm	With the bulbs built-in electronics this LuxOr replacement bulb sensing daylight automatically and turns on at dusk and turns off at dawn. No special wiring or switches are needed - just simply replace your bulb. LED-BAY15D-SL18-PW (Indexed Single Intensity): 1157

NEW



MR-16 BASE (4 x 1-Watt LEDs)

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
LED-MR16-4-WW	Warm White	Volts: 12 DC Lumens: WW: 270lm PW: 300lm View Angle: 60° Watts: 4.0W Length: 51mm Diameter: 50mm NON-polarity Sensitive	Q20MR16
LED-MR16-4-PW	Pure White		



E27 SCREW-IN BASE LAMPS 10-30V DC

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
LED-E27-3W-WW	Warm White	Lumens: 250	Watts: 3
LED-E27-3W-NW	Natural White	Lumens: 280	Watts: 3
LED-E27-6W-WW	Warm White	Lumens: 410	Watts: 6
LED-E27-6W-NW	Natural White	Lumens: 450	Watts: 6
LED-E27-8W-WW	Warm White	Lumens: 550	Watts: 8
LED-E27-8W-NW	Natural White	Lumens: 600	Watts: 8

Replaces your incandescent screw base E27 lamp with a low wattage high output LED lamps. Simply screws into your existing socket. Available in warm white (3000K) and natural white (4200K)







FLOOD LIGHTS / DRIVING LIGHTS SPREADER LIGHTS


HIGHLIGHT YOUR RECREATIONAL EXPERIENCE


For the times when sun up to sun down isn't long enough to enjoy your favourite outdoor activities LuxOr Marine & RV Products provides exceptional products that deliver supreme light output and durability that will highlight your recreational experience.


FLOOD LIGHTS / DRIVING LIGHTS / SPREADER LIGHTS


PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SL-18-S-WH	Spot	White	Volts: 10-30 DC Lumens: 1260 Watts: 18 AMP Draw at 12v DC: 1.5 LEDs: 6	SL-18 Series - Low Profile LED - Housing provides excellent heat dissipation and die cast lens frame. The clear lens is made in polycarbonate, for durability, with a choice of specialized optics including spot or flood type distribution pattern. Vibration free mounting bracket with stainless steel hardware combined with high performance silicone gasketing system ensures an IP68 enclosure rating for waterproof, dustproof, and shockproof. Up to 30,000 hours plus lifespan.
LED-SL-18-F-WH	Flood	White		
LED-SL-18-S-BL	Spot	Black		
LED-SL-18-F-BL	Flood	Black		

PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SL-20-D-WH	Diffuse	White	Volts: 10-30 DC Lumens: 1440 Watts: 20 AMP Draw at 12v DC: 1.67 LEDs: 4	SL-20 Series - Performance LED - Housing provides excellent heat dissipation and die cast lens frame. Choice of specialized optics include diffuse, spot or flood type distribution patterns, with lens made in polycarbonate. Vibration free mounting bracket with stainless steel hardware combined with high performance silicone gasketing system ensures an IP68 enclosure rating for waterproof, dustproof, and shockproof. Up to 30,000 hours plus lifespan.
LED-SL-20-S-WH	Spot	White		
LED-SL-20-F-WH	Flood	White		
LED-SL-20-D-BL	Diffuse	Black		
LED-SL-20-S-BL	Spot	Black		
LED-SL-20-F-BL	Flood	Black		

PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SL-30-D-WH	Diffuse	White	Volts: 10-30 DC Lumens: 3600 Watts: 30 AMP Draw at 12v DC: 2.5 LEDs: 6	SL-30 Series - Performance LED - Housing provides excellent heat dissipation and die cast lens frame. Choice of specialized optics include diffuse, spot or flood type distribution patterns, with lens made in polycarbonate. Vibration free mounting bracket with stainless steel hardware combined with high performance silicone gasketing system ensures an IP68 enclosure rating for waterproof, dustproof, and shockproof. Up to 30,000 hours plus lifespan.
LED-SL-30-S-WH	Spot	White		
LED-SL-30-F-WH	Flood	White		
LED-SL-30-D-BL	Diffuse	Black		
LED-SL-30-S-BL	Spot	Black		
LED-SL-30-F-BL	Flood	Black		

PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SLB-36-D-WH	Diffuse	White	Volts: 10-30 DC Lumens: 2640 Watts: 36 AMP Draw at 12v DC: 3.0 LEDs: 12	SLB-36 Series - LED Light Bars - High quality die cast aluminum, which provides excellent heat dissipation, these outdoor rugged construction floods are available in a white or black corrosion resistant paint finish. Your choice of specialized optics includes spot, flood and combo spot/flood type distribution patterns. Silicone gasket ensures a positive seal and waterproof IP67 rating. Up to 30,000 hours plus lifespan.
LED-SLB-36-S-WH	Spot	White		
LED-SLB-36-F-WH	Flood	White		
LED-SLB-36-D-BL	Diffuse	Black		
LED-SLB-36-S-BL	Spot	Black		
LED-SLB-36-F-BL	Flood	Black		


PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SLB-60-D-WH	Diffuse	White	Volts: 10-30 DC Lumens: 4200 Watts: 60 AMP Draw at 12v DC: 4.0 LEDs: 20	SLB-60 Series - LED Light Bars - High quality die cast aluminum, which provides excellent heat dissipation, these outdoor rugged construction floods are available in a white or black corrosion resistant paint finish. Your choice of specialized optics includes spot, flood and combo spot/flood type distribution patterns. Silicone gasket ensures a positive seal and waterproof IP67 rating. Up to 30,000 hours plus lifespan.
LED-SLB-60-S-WH	Spot	White		
LED-SLB-60-F-WH	Flood	White		
LED-SLB-60-D-BL	Diffuse	Black		
LED-SLB-60-S-BL	Spot	Black		
LED-SLB-60-F-BL	Flood	Black		

PART NUMBER	TUBE BAR SIZE	FEATURES
 LED-SL-MB-150	1.5"	SL-MB Series - Bar Mounting Kit CNC Machined Aluminum 6061T6 billet. Anodized black finish. Package is 2 (two) brackets - one for each end. Positional adjustment of 1" allows for flexible mounting requirements.
LED-SL-MB-175	1.75"	
LED-SL-MB-200	2.0"	
LED-SL-MB-250	2.5"	

Add Style and Energy Efficiency with Luxor LED Strip Lighting

Flexible Waterproof LED Strip Lighting

IP65



3M Adhesive Backing



Flexible Waterproof LED Strip Lighting

IP67



Easy Install Mounting Straps



Rigid Aluminum LED Strip Lighting





Easy Snap-in Installation Clips





LED Strip Lighting offers the perfect solution for creating energy efficient, stylish task, accent and mood lighting. Strip lights are discreet and flexible and can be mounted virtually anywhere. IP65 for indoors and IP67 rated with extensive UV protection for outdoors makes these strip LED's perfect for boating applications. Add the optional IR Controller and produce multiple colours (RGB – red, green blue combinations), control brightness and create special effects.

FLEXIBLE WATERPROOF STRIP LIGHTING

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-F565-2M-PW	○ Pure White	Volts: 12 DC LEDs: 30/m View Angle: 120° Watts: 7.2W/m Length: 2m or 5m Flexible, IP65 rated, indoor, encased in a flexible epoxy resin. Thin diameter, extremely low profile. Ready to connect to 12 volt DC power source. High Intensity, Superior Lumen Output. Cut to the perfect length at 4" intervals 7.2 Watt / Meter. Available in 2-metre or 5-metre roll Lumens quoted based on Pure White
	LED-F565-2M-BL	● Blue	
	LED-F565-2M-RGB	● RGB	
	LED-F565-5M-PW	○ Pure White	
	LED-F565-5M-BL	● Blue	
	LED-F565-5M-RGB	● RGB	





PART NUMBER	FEATURES
 LED-RGB-CONTROLLER	RGB Multifunction Controller with RF remote up to 10 metres. Choose light pattern, speed and brightness of 20 colours (RGB). Indoor only (IP20). The LuxOr controller is supplied with RF remote control. This premium RF controller can be installed in a remote or enclosed location and allows you to control the lighting functions without having a line of site to the controller. This is a premium controller while many other lower cost type controls are Infra Red (IR) which requires the remote to be pointed at the controller to adjust your lighting thus it must be exposed. The LuxOr controller also includes control buttons on the controller should the remote be displaced. The RF remote controller allows you to choose your desired lighting pattern. Note RGB controller must be mounted in a dry location.

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-F567-2M-PW	○ Pure White	Volts: 12 DC LEDs: 30/m View Angle: 120° Watts: 7.2W/m Length: 2m or 5m Flexible, IP67 rated, outdoor, encased in UV resistant clear silicone jacket. Ready to connect to 12 volt DC power source. Easy-install clips, low profile, cut to length at 4" intervals w/ end cap. High Intensity, Superior Lumen Output. Cut to the perfect length at 4" intervals 7.2 Watt / Metre. Available in 2-metre or 5-metre roll. Lumens quoted based on Pure White
	LED-F567-2M-BL	● Blue	
	LED-F567-2M-RGB	● RGB	
	LED-F567-5M-PW	○ Pure White	
	LED-F567-5M-BL	● Blue	
	LED-F567-5M-RGB	● RGB	
	LED-F567-STRAP	● RGB	





PONTOON PACKAGE

PART NUMBER	LIGHT COLOUR	FEATURES
 LED-FS65-2x8M-BL	● Blue 2 pcs 8m Long	Package includes 2 x IP65 weatherproof Blue (Output Colour) flexible lighting strips 8 meters in length with 3M Self-Adhesive backing. Can be cut in the field to length if required. Flexible IP65 rated outdoor strip lighting. Encased LED's offer an extremely low profile, which allows the installer to hide the light source for a visually unique illuminated surface. Utilizing 5050SMD LED's LuxOr's flexible weatherproof strip lighting offers superior lumen output. LuxOr's IP65 rated flexible lighting strips are supplied with a 3M Self-Adhesive backing, which allows the installation to be simple, and tool free.

PART NUMBER	LIGHT COLOUR	FEATURES
 LED-FS65-2x8M-RGB	● RGB 2 pcs 8m Long and Premium RF (Radio Frequency) Controller	Package includes 2 x IP65 weatherproof RGB (Red, Green Blue Output Colour) flexible lighting strips 8 meters in length with 3M Self-Adhesive backing, which allows the installation to be simple, and tool free. Can be cut in the field to length if required. Flexible IP65 rated outdoor strip lighting. Encased LED's offer an extremely low profile, which allows the installer to hide the light source for a visually unique illuminated surface. Utilizing 5050SMD LED's LuxOr's flexible weatherproof strip lighting offers superior lumen output. Also included is the LED-RGB-CONTROLLER RF multifunction RF (radio Frequency) remote controller.

RIGID UNDER-CABINET LIGHT STRIPS


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-UCS-12-WW	○ Warm White	Volts: 12 DC Lumens: 234/ft View Angle: 120° Watts: 4.3W/ft Length: 12"/18"/24" Width: 14.5mm Perfect for indoor accent or confined area lighting. Quiet, flicker-free, aluminum heat sink body ensures cool operation. Easy-install snap-in clips, low profile. Warm White or Cool White LED Lasts over 40,000 hours Sealed metal housing, sealed optics Includes switch Lumens quoted based on Pure White
	LED-UCS-12-PW	○ Pure White	
	LED-UCS-18-WW	○ Warm White	
	LED-UCS-18-PW	○ Pure White	
	LED-UCS-24-WW	○ Warm White	
	LED-UCS-24-PW	○ Pure White	





UNDERWATER MARINE LED FIXTURES





Add ambiance with underwater marine LED fixtures. Blue light is great for penetrating cloudy water while white light is optimum for clear water and for showing the natural beauty below.

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-6-3-W LED-RUWL-6-3-BL	○ Pure White	Volts: 8-28 DC Lumens: 720-760lm View Angle: 30° Watts: 3x6 LEDs: 6	8 to 28 Volt DC Fused Input w/ 5ft Waterproof Cable Constant Current Power Regulator for constant light output. Rugged 316 Marine Grade Stainless Steel Construction Cree brand LEDs, IP68 Waterproof Rating, CE and RoHS Approved 40,000 Hour Bulb Life, 1-Year Warranty Lumens quoted based on Pure White
	● Blue		


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-9-3-W LED-RUWL-9-3-BL	○ Pure White	Volts: 8-28 DC Lumens: 1000-1200lm View Angle: 30° Watts: 3x9 LEDs: 9	8 to 28 Volt DC Fused Input w/ 5ft Waterproof Cable Constant Current Power Regulator for constant light output. Rugged 316 Marine Grade Stainless Steel Construction Cree brand LEDs, IP68 Waterproof Rating, CE and RoHS Approved 40,000 Hour Bulb Life, 1-Year Warranty Lumens quoted based on Pure White
	● Blue		


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-60-W LED-RUWL-60-BL	○ Pure White	Volts: 9-32v DC Lumens: PW-2850lm BL-286lm View Angle: 140° Watts: 60 LEDs: 12 x 5 watt Cree Diameter: 20mm Length: 96mm	9 to 32v DC input with 4 foot sealed cable. Built in internal driver powers the Cree LED chips to provide super bright underwater lighting. Rugged 316L Marine Grade Stainless Steel housing is sealed to offer an IP68 waterproof rating. CE certification 40,000 Hour Bulb Life, 1-Year Warranty
	● Blue		

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-120-W LED-RUWL-120-BL	○ Pure White	Volts: 9-32v DC Lumens: PW-5700lm BL-572lm View Angle: 140° Watts: 120 LEDs: 24 x 5 watt Cree Diameter: 20mm Length: 142mm	9 to 32v DC input with 4 foot sealed cable. Built in internal driver powers the Cree LED chips to provide super bright underwater lighting. Rugged 316L Marine Grade Stainless Steel housing is sealed to offer an IP68 waterproof rating. CE certification 40,000 Hour Bulb Life, 1-Year Warranty
	● Blue		


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-SUWL-6-3-W LED-SUWL-6-3-BL	○ Pure White	Volts: 8-28 DC Lumens: 720-760lm View Angle: 30° Watts: 3x6 LEDs: 6	8 to 28 Volt DC Fused Input w/ 5ft Waterproof Cable Constant Current Power Regulator for constant light output. Rugged 316 Marine Grade Stainless Steel Construction Cree brand LEDs, IP68 Waterproof Rating, CE and RoHS Approved 40,000 Hour Bulb Life, 1-Year Warranty Lumens quoted based on Pure White
	● Blue		


UNDERWATER DRAIN PLUG LED w/ WATERPROOF QUICK DISCONNECT


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-DPUWL-9HP-W	○ Pure White	Volts: 8-28 DC	Easily replaces your 1/2" drain plug! Simply screw into the 1/2" threaded entry or SDF Sea dog fitting 520010-1 and wire. Brilliant 800 lumen output. Bronze shell with chrome finish. Polycarbonate lens. Built-in 8 to 28v DC built-in driver and automatic overheat shutdown protection. COB LED, IP68 Waterproof Rating, CE and RoHs Approved.
LED-DPUWL-9HP-BL	● Blue	Lumens: PW: 800lm	
LED-DPUWL-9HP-GR	● Green	Watts: 1x9	
LED-DPUWL-9HP-W-SDF	○ Pure White	LEDs: 1	
LED-DPUWL-9HP-BL-SDF	● Blue		

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 NEW LED-DPUWL-27HP-W	○ Pure White	Volts: 11-28 DC	Easily replaces your 1/2" drain plug! Simply screw into the 1/2" threaded entry or SDF Sea dog fitting 520010-1 and wire. Intense 1800 lumen output (white). Construction from Titanium Aluminum Alloy with a Polycarbonate lens. Built-in 11 to 28 volt DC driver and automatic overheat shutdown protection. COB LED, IP68 Waterproof Rating, CE and RoHs Approved.
LED-DPUWL-27HP-BL	● Blue	Lumens: PW: 1800lm	
		Watts: 3x9	
		LEDs: 9	

HIGHFIELD DINGHY UNDERWATER PACKAGE includes DRAIN PLUG ADAPTOR & LED LIGHT w/ WATERPROOF QUICK DISCONNECT

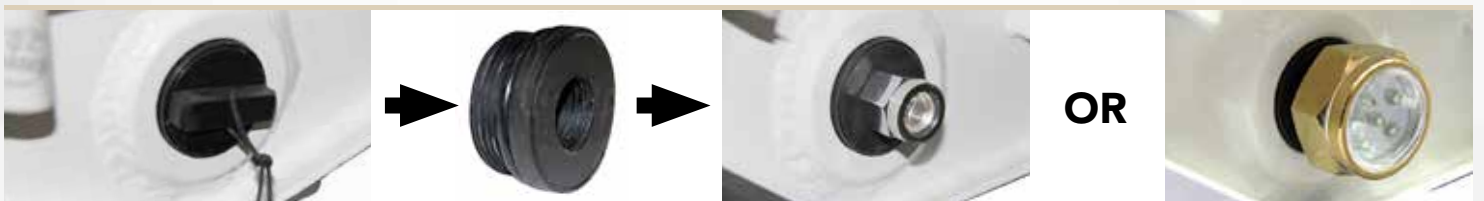

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 NEW LED-DPUWL-9HP-WH-HFA	○ Pure White plus adapter	Volts: 8-28 DC	Package includes includes a drain plug adaptor as well as LED light in either Pure White or Blue. Create an ambience behind your dinghy by adding underwater lighting to your Highfield Dinghy with the Luxor Marine & RV hightailed drain plug adaptor. Simply remove your existing Highfield drain plug and store it in a safe place and install the Luxor Marine drain plug under water light supplied with a drain plug adaptor to fit your Highfield dinghy. No holes are required to be made in the aluminum hull just install the Luxor Marine Highfield underwater package.
LED-DPUWL-9HP-BL-HFA	● Blue plus adapter	Lumens: PW: 800lm	
		Watts: 1x9	
		LEDs: 1	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 NEW LED-DPUWL-27HP-WH-HFA	○ Pure White plus adapter	Volts: 11-28 DC	Package includes includes a drain plug adaptor as well as LED light in either Pure White or Blue. Create an ambience behind your dinghy by adding underwater lighting to your Highfield Dinghy with the Luxor Marine & RV hightailed drain plug adaptor. Simply remove your existing Highfield drain plug and store it in a safe place and install the Luxor Marine drain plug under water light supplied with a drain plug adaptor to fit your Highfield dinghy. No holes are required to be made in the aluminum hull just install the Luxor Marine Highfield underwater package.
LED-DPUWL-27HP-BL-HFA	● Blue plus adapter	Lumens: PW: 1800lm	
		Watts: 3x9	
		LEDs: 9	

SPIDER SPRAY FOR MARINE & RV

PART NUMBER

LG-SPDR

FEATURES

Eco Friendly. No VOC's or Alcohols. Water-Based Spray.
Non-VOC Aerosol Can Technology gives you 25% more product than other Aerosol Dispensers containing VOC.

No Mess. No Dripping. No Residue. No Waste.

Residual insecticide that kills a wide range of insects, spiders, ants, earwigs, cockroaches, crickets and more.

Non-Flammable, Non-Hazardous and Biodegradable

For Indoor and Outdoor Use

Quantity is 400g / Can



MOLD AND MILDEW REMOVER SPRAY FOR MARINE & RV

PART NUMBER

LG-MMR

FEATURES

Luxguard Mold and Mildew Remover contains an agent that will whiten and brighten while cleaning. Does not contain bleach(sodium hypochlorite).

Suitable for use to remove odour causing mold, mildew, bacteria, and other microbial growth on porous, semi-porous, and non-porous materials.

Contains no dyes or perfumes, and is not corrosive like many industrial cleaners.

Aerosol is a non- propellant based, ready-to-use formula that can be applied uniformly in 360 degrees.

Quantity is 400g / Can



NOTES

Add Ambiance with Underwater Marine LED Fixtures



Available in Bright White or Blue

Blue light is great for penetrating cloudy water while white light is optimum for clear water and for showing the natural beauty below.

Only a small hole (1/4") is required to pass the wire thru the hull. Three stainless screws are required to secure the light to the hull.

Due to their power, the lamps must be immersed in water.

Luxor Marine & RV Products

Division of 2457925 Ontario Ltd.
P.O. Box 20062, Pioneer Park P.O.
Kitchener, ON N2P 2B4
519-240-2882
sales@luxormarine-rv.ca



Your Canadian Source for LED Lighting

March 2016

www.luxormarine-rv.ca