


2022

LED Lighting

for Marine & RV



LED Bulbs

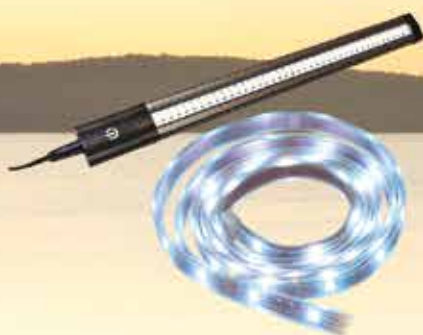

LED Strip Lighting




LED Fixtures



LED Underwater Lighting



Courtesy Lights

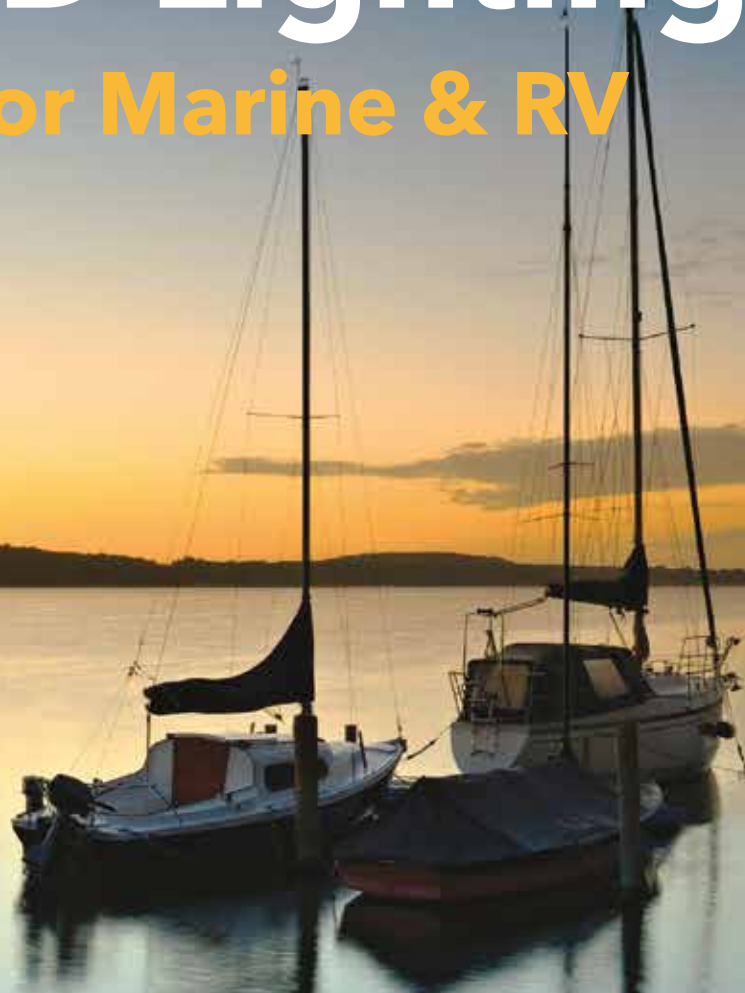

NEW
High Powered
45 Watt
Underwater
Drain Plug
w/Quick Disconnect



LuxOr
MARINE & RV PRODUCTS 

TABLE OF CONTENTS

LED Bulbs

T-10 Base	1
G4 Base	2
G4 Sapphire COB	3
Multi Colour Output - G4 Base	3
Multi Level Output - G4 Base	4
MR-16 Base	8
E27 Screw-in Base	8
Festoon Base	8
Bayonet Base	10

Fixtures

G4 Base	5
Courtesy Lights	5

Wall / Ceiling Mount LED Luminaires

Aqua Series Reading Lights	6
Aqua Series Low Profile Luminaires	7

Flood / Driving / Spreader Lights

Low Profile LED	13
Performance LED	13
LED Light Bars	13

Strip Lighting

Flexible Waterproof Strip Lighting	15
Pontoon Package	15
Rigid Under-Cabinet Light Strips	15
Slim Line Rigid Under-Cabinet Light Strips ..	16

Underwater LEDs

Underwater Marine LED Transom Fixtures ...	17
Waterproof RGB Controller	18
Compact Low Profile Underwater Light	19
Underwater Drain Plug LED	19
Stainless Steel Underwater Drain Plug LED ..	19

LuxGuard Marine & RV Products

Gelcoat Protector Film	21
------------------------------	----

Why choose LuxOr LEDs?

LuxOr LED solid state lamps use as little as one-fifth (1/5) as much power as conventional light bulbs. This reduced demand means you get much more cruising/anchor time between battery re-charging cycles.

Conventional Lighting



Conventional battery power required compared to LuxOr LED powered lighting for the same lighting load

See the LuxOr LED Difference. More Power – Longer!



Typical draw - 4 LuxOr G45-12-WW LED Lamps



Typical draw - 4 - 10W Xenon Halogen Lamps

Never Change a Light Bulb Again

– LuxOr LEDs last much longer - up to 40,000 hrs

Shock and Vibration Resistant

– No filament to break or burn out

Do-It-Yourself

– LuxOr LEDs install just like ordinary light bulbs

Very Little Heat Generated

– Fixtures last longer & air conditioning draw is reduced

Environmentally Friendly

– LuxOr LEDs contain NO mercury

Exceptional Lighting Quality

- Consistent through a range of voltages
- No blinking or flickering
- LuxOr warm white LEDs operate in the same spectrum as incandescent bulbs (2,800k to 3,500k)
- Some LEDs also available in Pure White and Blue

*Note: Cross reference guide offers parts numbers which could be used to replace existing lighting bulbs. The cross reference guide is not an exact equal but bulbs will perform a similar task. LuxOr Marine & RV Products is not responsible for errors or omissions and only offers this guide as an aid to selecting the correct lamp. However, we offer a 100% satisfaction guarantee. If the bulb you order does not fit your fixture, we will replace it with one that does. If you are in doubt, to ensure proper selection is made consult sales@luxormarine-rv.ca.

T-10 BASE

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-T10-5HP-WW LED-T10-5HP-PW LED-T10-5HP-BL	<input type="radio"/> Warm White <input type="radio"/> Pure White <input checked="" type="radio"/> Blue	Volts: 12v DC Lumens: 70-75lm View Angle: 360° Watts: 1.0w Length: 28.5mm Diameter: 11.5mm Polarity Sensitive	Replaces - 168 - 906  Lumens quoted based on Pure White
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-T10-8-WW LED-T10-8-PW LED-T10-8-BL	<input type="radio"/> Warm White <input type="radio"/> Pure White <input checked="" type="radio"/> Blue	Volts: 12v DC Lumens: 25-30lm View Angle: 360° Watts: 0.4-0.5w Length: 22mm Diameter: 11.5mm Polarity Sensitive	Replaces - 194  Lumens quoted based on Pure White
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-T10-9HP-WW LED-T10-9HP-BL	<input type="radio"/> Warm White <input checked="" type="radio"/> Blue	Volts: 12v DC Lumens: 130-135lm View Angle: 360° Watts: 1.6w Length: 34.5mm Diameter: 11.5mm Polarity Sensitive	Replaces - 906 - 912  Lumens quoted based on Pure White
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-T10-12HP-WW LED-T10-12HP-PW	<input type="radio"/> Warm White <input type="radio"/> Pure White	Volts: 10 to 30v DC Lumens: 120-140lm View Angle: 120-130° Watts: 2.0w Length: 31.5mm Diameter: 11.0mm NON-Polarity Sensitive	 Lumens quoted based on Pure White
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-T10-13HP-WW	<input type="radio"/> Warm White	Volts: 12v DC Lumens: 180-190lm View Angle: 360° Watts: 3.1w Length: 41.5mm Diameter: 11.5mm Polarity Sensitive	
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-T10-25-WW	<input type="radio"/> Warm White	Volts: 12v DC Lumens: 80-90lm View Angle: 360° Watts: 1.5-1.6w Length: 37mm Diameter: 12.5mm Polarity Sensitive	

Three things you really need to know about buying LEDs

1. Lumen Output? A Lumen is the unit of measure used to calculate how much any light bulb puts out. The higher the Lumens, the brighter the light. This information is important when judging the quality of an LED.
2. Converting to LEDs is as easy as changing bulbs! LuxOr LED bulbs will fit your existing fixtures and include a 2-year warranty. Satisfaction Guaranteed!
3. How do You Calculate Life and Reliability? Life and reliability of a LED is dependant on the quality of materials used and the operating temperature of the system. Premium quality LEDs such as the ones sold by LuxOr, are designed to be cool operating, thus extending the lamp life. LuxOr LED's are rated for up to 40,000 hours of life.

Changing to LED is EASY!



Remove the old bulb



Install the new LuxOr LED

LuxOr LED bulbs will fit your existing fixtures.

2-YEAR WARRANTY. SATISFACTION GUARANTEED!

G4 BASE BULBS
















All LuxOr G4 bulbs are 10-30 volt DC and NON-Polarity Sensitive

G4 Features









- Products are CE and Rohs certified
- Lamps are lead and mercury free
- No UV output
- Zero RF emission with surface mount device design

- LuxOr lamps are designed to minimize EMI by utilizing a specially designed PCB layouts which avoid tracks acting as antenna's that radiate EMI (Electromagnetic interference)
- LuxOr G4 design incorporates Transient suppressor and fuse (self re-setting electronic fuse) which provides extra protection against current overload and voltage spikes. This ensures maximum amp life.





G4 BASE - SIDE PIN

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-G4S-6-WW LED-G4S-6-PW LED-G4S-6-BL	 Warm White  Pure White  Blue	Volts: 10 to 30v DC Lumens: WW: 135lm PW: 137lm BL: 31lm View Angle: 120-130° Watts: 1.0w Diameter: 24mm Thickness: 9mm	Replaces 5 W - 529361 
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-G4S-9-WW LED-G4S-9-PW LED-G4S-9-BL	 Warm White  Pure White  Blue	Volts: 10 to 30v DC Lumens: WW: 187lm PW: 192lm BL: 46lm View Angle: 120-130° Watts: 1.6w Diameter: 28mm Thickness: 9mm	Replaces 10 W - 529362 - 529338 
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-G4S-12-WW LED-G4S-12-PW LED-G4S-12-BL	 Warm White  Pure White  Blue	Volts: 10 to 30v DC Lumens: WW: 268lm PW: 277lm BL: 65lm View Angle: 120-130° Watts: 2.2w Diameter: 31.5mm Thickness: 9mm	Replaces 20 W - 529367 - 529368 

G4 BASE - BACK PIN

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-G4B-6-WW LED-G4B-6-PW	 Warm White  Pure White	Volts: 10 to 30v DC Lumens: WW: 135lm PW: 137lm View Angle: 120-130° Watts: 1.0w Diameter: 24mm Thickness: 9mm	Replaces 5 W - 529361 
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-G4B-9-WW LED-G4B-9-PW	 Warm White  Pure White	Volts: 10 to 30v DC Lumens: WW: 187lm PW: 192lm View Angle: 120-130° Watts: 1.6w Diameter: 28mm Thickness: 9mm	Replaces 10 W - 529362 - 529338 
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-G4B-12-WW LED-G4B-12-PW	 Warm White  Pure White	Volts: 10 to 30v DC Lumens: WW: 268lm PW: 277lm View Angle: 120-130° Watts: 2.2w Diameter: 31.5mm Thickness: 9mm	Replaces 20 W - 529367 - 529368 





G4 SAPPHERE COB LED





PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 LED-G4-COB-15-WW LED-G4-COB-15-PW	 Warm White  Pure White	Volts: 10 to 20v DC Watts: 2.0w Lumens: PW: 225lm WW: 235lm View Angle: 360° Dimension Diameter: 12.5mm Length: 39mm NON-Polarity Sensitive	The newest Luxor Marine & RV LED G4 Light produces over 200 lumen output of light with a 360 degree spread instead of the traditional directional beam. The COB LED light replaces a 25-30w Halogen. A Soft Warm White or Pure White, allows the end user to capture their desire lighting ambience. A transparent encapsulated body protects the bulb from the elements.	Replaces 20 W - 529367 - 529368 

MULTI COLOUR OUTPUT BULBS - G4 BASE




The **dual and tri-colour switching bulbs** offer the boater an opportunity to have a two or three colour replacement bulb that switches colour for different ambiances without the need to change the fixture, install extra switches or add new or additional wiring. Simply replace the bulb and use the existing switch to change the colours.

DUAL COLOUR SWITCHING LED BULBS

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 LED-G4S-6PW-3BL LED-G4S-6PW-3RD	 6 Pure White & 3 Blue  6 Pure White & 3 Red	Volts: 10 to 30v DC Lumens: PW: 123lm BL: 13lm RD: 15lm View Angle: 120° Watts: 0.7w / 1.3w Diameter: 30mm Thickness: 11.4mm	Number of LEDs: 9 - SMD5050	Can replace a 5w or 10w halogen bulb 

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 LED-G4S-10PW-6BL LED-G4S-10PW-6RD	 10 Pure White & 6 Blue  10 Pure White & 6 Red	Volts: 10 to 30v DC Lumens: PW: 182lm BL: 24lm RD: 27lm View Angle: 120° Watts: 1.0w / 1.7w Diameter: 33mm Thickness: 11.4mm	Number of LEDs: 16 - SMD5050	Can replace a 5w or 10w halogen bulb 

TRI COLOUR SWITCHING LED BULBS

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 LED-G4S-6PW-4RD-3BL	 6 Pure White, 4 Red & 3 Blue	Volts: 10 to 30v DC Lumens: PW: 123lm RD: 20lm BL: 13lm View Angle: 120° Watts: PW: 0.7w Red: 0.6w Blue: 0.45w Diameter: 33mm Thickness: 11.5mm	Number of LEDs: 13 - SMD5050	Can replace a 5w or 10w halogen bulb 

Above bulbs also available in back pin configurations. Replace the LED-G4S- with LED-G4B- for back pin configuration.


Simply Replace The G4 Bulb - no wiring or special fixtures required.

Dual colour and tri-colour bulbs are not automatic switching.

This is the operating sequence:

Tri-colour Instructions: switch on → red light • switch off and on → pure white light • switch off and switch on → blue light



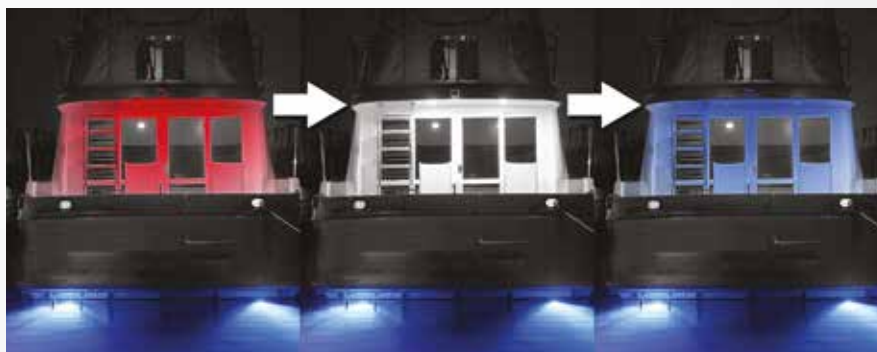

Dual colour instructions: switch on → red light • switch off and on within 1.5 seconds → pure white light • switch off and after 5 seconds, switch on → red light








MULTI LEVEL OUTPUT BULBS - G4 BASE

The **multi level output bulbs** offer boaters the ability to achieve two or three levels of lighting by replacing their standard 5 watt or 10 watt G4 halogen bulb to a LuxOr Marine multi level replacement bulb. Switch between 9 LEDs, to 6 LEDs to 3 LEDs offering you tri level lighting or between 6 LEDs and 3 LEDs for dual level lighting. All this can be done without changing the fixture, installing extra switches or an expensive dimmer switch or add new or additional wiring. Simply remove and install the LuxOr Marine G4 multi level output replacement bulbs.

DUAL LIGHT LEVEL

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-G4S-6WW-3WW	○ Warm White - 6 to 3	Volts: 10 to 30v DC Lumens: WW: 6-129, 3-65lm PW: 6-137, 3-70lm View Angle: 120° Watts: 1.3w / 0.7w Diameter: 30mm Thickness: 11.4mm	Number of LEDs: 9 - SMD5050 Can replace a 5w or 10w halogen bulb
LED-G4S-6PW-3PW	○ Pure White - 6 to 3		  

TRI LIGHT LEVEL

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-G4S-9WW-6WW-3WW	○ Warm White - 9 to 6 to 3	Volts: 10 to 30v DC Lumens: WW: 9-187, 6-129, 3-65lm PW: 9-192, 6-137, 3-70lm View Angle: 120° Watts: 1.9w / 1.3w / 0.7w Diameter: 30mm Thickness: 11.4mm	Number of LEDs: 13 - SMD5050 Can replace a 5w or 10w halogen bulb
LED-G4S-9PW-6PW-3PW	○ Pure White - 9 to 6 to 3		   

Above bulbs also available in back pin configurations. Replace the LED-G4S- with LED-G4B- for back pin configuration.

Simply Replace The G4 Bulb - no wiring or special fixtures required.

Dual level and tri-level bulbs are not automatic switching.
This is the operating sequence:

Tri-level Instructions:

switch on → bright light (9 LEDs) • switch off and on → mid-level light (6 LEDs) • switch off and switch on → low light (3 LEDs)

Dual level instructions:

switch on → mid-level light (6 LEDs) • switch off and on within 1.5 seconds → low light (3 LEDs) • switch off and after 5 seconds, switch on → mid-level light (6 LEDs)



LED TIP: All LuxOr G-4 bulbs are 10-30 volt DC, are NON-Polarity sensitive and:


- Have a true Constant Current driver
- Feature 2-layer aluminum PCB for superior heat dissipation
- Use SI-EN33501C which meets CE EMI standard (prevents interference with radio, GPS, etc.)

To maximize life and brightness, we want to drive the LED at its design forward-current, regardless of input voltage and we do not want to over-drive the LED. We utilize an integrated circuit in our Constant Current products, which provides constant current to the bulb from 10-30 volts DC. This ultimately means that the bulb is the same brightness at 10 volts as it is at 30 volts and the LEDs are being protected regardless of the voltage.

FIXTURES - G4 BASE



SPECIFICATIONS



FEATURES

NV Series is a highly diversified low profile recessed ceiling light fixture, which allows it to fit into many applications. You can also easily coordinate throughout your boat or motor coach. Select from a multitude of LED bulb combinations to create the desired lighting ambiance.
Voltage: 10 - 30v DC
Mounting: Springs
Indoor/Dry Location Use Only

SINGLE COLOUR LIGHTS

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-NV-CH-12-WW	○ Warm White - 12	Chrome
LED-NV-CH-12-PW	○ Pure White - 12	Chrome
LED-NV-CH-9-WW	○ Warm White - 9	Chrome
LED-NV-CH-9-PW	○ Pure White - 9	Chrome
LED-NV-CH-6-WW	○ Warm White - 6	Chrome
LED-NV-CH-6-PW	○ Pure White - 6	Chrome
LED-NV-WH-12-WW	○ Warm White - 12	White
LED-NV-WH-12-PW	○ Pure White - 12	White
LED-NV-WH-9-WW	○ Warm White - 9	White
LED-NV-WH-9-PW	○ Pure White - 9	White
LED-NV-WH-6-WW	○ Warm White - 6	White
LED-NV-WH-6-PW	○ Pure White - 6	White

TRI & DUAL LEVEL OUTPUT

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-NV-CH-TL-9-6-3-WW	○ Warm White - 9 to 6 to 3	Chrome
LED-NV-CH-TL-9-6-3-PW	○ Pure White - 9 to 6 to 3	Chrome
LED-NV-WH-TL-9-6-3-WW	○ Warm White - 9 to 6 to 3	White
LED-NV-WH-TL-9-6-3-PW	○ Pure White - 9 to 6 to 3	White
LED-NV-CH-DL-6-3-WW	○ Warm White - 6 to 3	Chrome
LED-NV-CH-DL-6-3-PW	○ Pure White - 6 to 3	Chrome
LED-NV-WH-DL-6-3-WW	○ Warm White - 6 to 3	White
LED-NV-WH-DL-6-3-PW	○ Pure White - 6 to 3	White

MULTI COLOUR OUTPUT (COLOUR CHANGING)

PART NUMBER	LED COLOUR & QUANTITY	FINISH
LED-NV-CH-TC-6PW-4RD-3BL	9 Pure White - 4 Red - 3 Blue	Chrome
LED-NV-WH-TC-6PW-4RD-3BL	9 Pure White - 4 Red - 3 Blue	White
LED-NV-CH-DC-6PW-3BL	6 Pure White - 3 Blue	Chrome
LED-NV-WH-DC-6PW-3BL	6 Pure White - 3 Blue	White
LED-NV-CH-DC-6PW-3RD	6 Pure White - 3 Red	Chrome
LED-NV-WH-DC-6PW-3RD	6 Pure White - 3 Red	White

COURTESY LIGHTS

COURTESY DOWNLIGHT

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-DL6-SS-W LED-DL6-SS-BL	○ White ● Blue	Volts: 12v DC LED's: 1 x 0.6 watt LED View Angle: 90° Dimension Diameter: 22mm Length: 22.5mm Hole Diameter: 18mm Rating: IP67 Material: 304 Stainless Steel Lens: Glass	Compact recessed design allows for many applications to utilize this LED luminaire. 12v DC input with 4 foot sealed cable. Built in internal driver with over temperature protection powers the 0.6 watt LED chip to provide ambient lighting. Rugged 304 Stainless Steel housing is sealed to offer an IP67 waterproof rating. CE certification 40,000 Hour Bulb Life. 1-Year Warranty

SHIELDED COURTESY DOWNLIGHT

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-CL8-SS-W LED-CL8-SS-BL	○ White ● Blue	Volts: 12v DC LED's: 1 x 0.8 watt LED View Angle: 90° Dimension Diameter: 26mm Length: 36mm Hole Diameter: 18mm Rating: IP67 Material: 304 Stainless Steel	Semi cutoff light distribution provided by the 0.8 watt LED chip provides excellent low surface ambient lighting in either colour blue or white. Compact recessed design allows for many applications to utilize this LED luminaire. The fixture operates on 12v DC input with 4 foot sealed cable with waterproof connector. Built in internal driver with over temperature protection powers the LED. Rugged Stainless Steel housing is sealed to offer an IP67 waterproof rating. CE certification 40,000 Hour Bulb Life. 1-Year Warranty

AQUA SERIES WALL MOUNTED READING LIGHTS

The Luxor Marine Aqua Series offers a stylish yet attractive interior LED luminaire for your interior lighting needs.

The Aqua Series provides a warm white light that illuminates your cabin interior. The touch dimming allows you to control the fixture brightness or light output which is ideal for cabin lighting or a reading light.



When first turned on the built-in Touch Dimming switch produces a smooth blue glow.


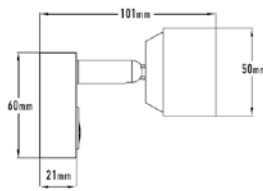
Touch dimming is simple, simply touch the switch and hold it until the desired lighting level is achieved.



The Touch Dimming retains the last setting so when the power is turned off and then back on the light level will remain the same as the last setting.



Swivel head allows you to direct the light to the task you want to illuminate.



AQUA SERIES DECORATIVE WALL LAMP

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	
 LED-AQWS-CH-TD-WW	Warm White	Volts: 10 to 30v DC Watts: 1.0w Lumens: 130lm CCT: 2800-3100K Dimension Length: 80mm Width: 40mm Height: 90mm	Chrome Finish Built In Touch Dimming Warm White High Output Blue Night Light Swivel Head Adjustment Easy to Install	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	
 LED-AQWR-BN-TD-WW	Warm White	Volts: 10 to 30v DC Watts: 3.0w Lumens: 169lm CCT: 2800-3100K Dimension Length: 60mm Width: 60mm Height: 100mm	Brushed Nickel Finish Built In Touch Dimming Warm White High Output Blue Night Light Swivel Head Adjustment Easy to Install	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	
 LED-AQWD-BN-TD-WW	Warm White	Volts: 10 to 16v DC Watts: 3.0w Lumens: 270lm CCT: 3000K Dimension Length: 101mm Height: 89mm Base Diameter: 65mm Base Height: 15mm	Brushed Nickel Finish Built in Touch Dimming Warm White Output Blue Night Light Swivel Head Adjustment Easy to Install	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	
 LED-AQWC-CH-TD-WW	Warm White	Volts: 10 to 30v DC Watts: 3.0w Lumens: 219lm CCT: 2800-3100K Dimension Width: 63mm Height: 83mm Base Diameter: 65mm Base Height: 15mm	Chrome Finish Built In Touch Dimming Warm White High Output Blue Night Light Swivel Head Adjustment Easy to Install	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	
 LED-AQWY-BN-TD-WW	Warm White	Volts: 10 to 30v DC Watts: 3.0w Lumens: 257lm CCT: 2800-3100K Dimension Length: 80mm Width: 73mm Height: 100mm	Brushed Nickel Finish Built in Touch Dimming Warm White High Output Blue Night Light Swivel Head Adjustment Easy to Install	

AQUA SERIES LOW PROFILE FLUSH MOUNTED CEILING OR WALL LUMINAIRES

The Luxor Aqua Series offers a stylish yet attractive low profile interior LED luminaire for your interior lighting needs. The Aqua Series provides a warm white light that illuminates your cabin interior. The touch dimming allows you to control the fixture brightness or light output which is ideal for cabin lighting

TOUCH DIMMING WARM WHITE WITH BLUE NIGHT LIGHT

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-AQRC-CH-TD-WW-BL	○ Warm White	Volts: 10 to 16v DC Watts: 4.5w Lumens: 510lm CCT: 2800-3100K Dimension Diameter: 130mm Height: 12mm	When first turned on the built-in Touch Dimming switch produces a smooth blue glow. Touch dimming is simple, simply touch the switch and hold it until the desired lighting level is achieved. Chrome Finish Decorative Low Profile Design Built In Touch Dimming Warm White High Output Blue Night Light

TOUCH DIMMING WARM WHITE WITH BLUE NIGHT LIGHT

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-AQSC-CH-TD-WW-BL	○ Warm White	Volts: 10 to 16v DC Watts: 3.5w Lumens: 335lm CCT: 2800-3100K Dimension Length: 100mm Width: 100mm Height: 10mm	When first turned on the built-in Touch Dimming switch produces a smooth blue glow. Touch dimming is simple, simply touch the switch and hold it until the desired lighting level is achieved. Chrome Finish Decorative Low Profile Design Built In Touch Dimming Warm White High Output Blue Night Light

AQUA SERIES CEILING LUMINAIRE WITH TOUCH DIMMING WARM WHITE

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-RDM3-WH-3-TD-WW	○ Warm White	Volts: 10 to 16v DC Watts: 3.0w Lumens: 295lm CCT: 2800-3100K Dimension Diameter: 74mm Height: 10mm	White Finish Decorative Low Profile Design Built In Touch Dimming Warm White High Output

AQUA SERIES CEILING LUMINAIRE WITH TOUCH DIMMING WARM WHITE

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-RDM4-WH-6-TD-WW	○ Warm White	Volts: 10 to 30v DC Watts: 6.0w Lumens: 585lm CCT: 2800-3100K Dimension Diameter: 120mm Height: 8.5mm	White Finish Decorative Low Profile Design Built In Touch Dimming Warm White High Output

AQUA SERIES CEILING LUMINAIRE

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-RDM3-CH-4-WW	○ Warm White	Volts: 10 to 30v DC Watts: 4.0w Lumens: 377lm CCT: 2800-3100K Dimension Diameter: 80mm Height: 15mm	Chrome Finish Separate On / Off Required Decorative Low Profile Design Aluminum Construction Warm White High Output

AQUA SERIES CEILING LUMINAIRE WARM WHITE SWITCHED

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-RDM4-CH-6-WW	○ Warm White	Volts: 10 to 30v DC Watts: 6.0w Lumens: 508lm CCT: 2800-3100K Dimension Diameter: 100mm Height: 15mm	Chrome Finish Separate On / Off Required Decorative Low Profile Design Aluminum Construction Warm White High Output

MR-16 BASE (4 X 1-WATT LEDS)



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
LED-MR16-4-WW	○ Warm White	Volts: 12v DC	Q20MR16
LED-MR16-4-PW	○ Pure White	Lumens: WW: 270lm PW: 300lm	
		View Angle: 60°	
		Watts: 4.0w	
		Length: 51mm	
		Diameter: 50mm NON-Polarity Sensitive	

E27 SCREW-IN BASE LAMPS




PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
LED-E27-7W-WW	○ Warm White	Volts: 10 to 36v DC Lumens: 595lm Watts: 7w Diameter: 60mm Length: 109mm NON-Polarity Sensitive	Replaces your incandescent screw base E27 lamp with a low wattage high output LED lamps. Simply screws into your existing socket. Available in warm white (3000K) and natural white (4200K)




PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
LED-E27-12W-WW	○ Warm White	Volts: 10 to 36v DC Lumens: 995lm Watts: 12w Diameter: 65mm Length: 125mm NON-Polarity Sensitive	Replaces your incandescent screw base E27 lamp with a low wattage high output LED lamps. Simply screws into your existing socket. Available in warm white (3000K) and natural white (4200K)

FESTOON BASE




PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
LED-FEST-31-2HP-WW	○ Warm White	Volts: 12v DC	Lumens quoted based on Pure White	
LED-FEST-31-2HP-PW	○ Pure White	Lumens: 25-30lm		
LED-FEST-31-2HP-BL	● Blue	View Angle: 120-150°		
		Watts: 0.6w		
		Length: 31mm		
		Diameter: 8mm Polarity Sensitive		




PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
LED-FEST31-8-WW	○ Warm White	Volts: 10 to 30v DC	Number of LEDs: 8 - SMD3528	
LED-FEST31-8-PW	○ Pure White	Lumens: WW: 66lm PW: 70lm		
		View Angle: 360°		
		Watts: 0.7w		
		Diameter: 13mm		
		Length: 31mm NON-Polarity Sensitive		








PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
LED-FEST-36-3HP-WW	○ Warm White	Volts: 12v DC	Lumens quoted based on Pure White	
LED-FEST-36-3HP-PW	○ Pure White	Lumens: 40-45lm		
LED-FEST-36-3HP-BL	● Blue	View Angle: 120-150°		
		Watts: 0.8w		
		Length: 36mm		
		Diameter: 8mm Polarity Sensitive		



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
LED-FEST-39-3HP-WW	○ Warm White	Volts: 12v DC	Lumens quoted based on Pure White	
LED-FEST-39-3HP-PW	○ Pure White	Lumens: 40-45lm		
LED-FEST-39-3HP-BL	● Blue	View Angle: 120-150°		
		Watts: 0.8w		
		Length: 39mm		
		Diameter: 8mm Polarity Sensitive		

FESTOON BASE

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 LED-FEST-42-6HP-WW LED-FEST-42-6HP-PW LED-FEST-42-6HP-BL	○ Warm White	Volts: 10 to 30v DC Lumens: WW: 96lm PW: 102lm BL: 31lm	Number of LEDs: 12 - SMD3528 Barrel Type LED 42mm Aqua Signal Type Dimpled Barrel End Festoon	Replaces - 211-2 - 212-2 - 522112
	○ Pure White	View Angle: 120-150° Watts: 1.0w Length: 42mm Diameter: 16.5mm NON-Polarity Sensitive		
	● Blue			
 LED-FEST-42-9HP-WW LED-FEST-42-9HP-PW LED-FEST-42-9HP-BL	○ Warm White	Volts: 10 to 30v DC Lumens: WW: 170lm PW: 179lm BL: 46lm	Number of LEDs: 12 - SMD3528 Barrel Type LED 42mm Aqua Signal Type Dimpled Barrel End Festoon	Replaces - 211-2 - 212-2 - 522112
	○ Pure White	View Angle: 180° Watts: 1.6w Length: 42mm Width: 27mm NON-Polarity Sensitive		
	● Blue			
 LED-FEST42-12-WW LED-FEST42-12-PW	○ Warm White	Volts: 10 to 30v DC Lumens: WW: 80lm PW: 90lm	Number of LEDs: 12 - SMD3528 Barrel Type LED 42mm Aqua Signal Type Dimpled Barrel End Festoon	Replaces - 211-2 - 212-2 - 522112
	○ Pure White	View Angle: 360° Watts: 1.0w Diameter: 13mm Length: 42mm NON-Polarity Sensitive		
 LED-FEST42B-12-WW LED-FEST42B-12-PW	○ Warm White	Volts: 10 to 30v DC Lumens: WW: 80lm PW: 90lm	Number of LEDs: 12 - SMD3528 Barrel Type LED 42mm Aqua Signal Type Dimpled Barrel End Festoon	Replaces - 529104 - 529333
	○ Pure White	View Angle: 360° Watts: 1.0w Diameter: 13mm Length: 42mm NON-Polarity Sensitive		
 LED-FEST42-30-WW LED-FEST42-30-PW	○ Warm White	Volts: 10 to 30v DC Lumens: WW: 160lm PW: 165lm	Number of LEDs: 30 - SMD3528 Barrel Type LED 42mm Aqua Signal Type Dimpled Barrel End Festoon	Replaces - 211-2 - 212-2 - 522112
	○ Pure White	View Angle: 360° Watts: 1.8w Diameter: 22mm Length: 42mm NON-Polarity Sensitive		
 LED-FEST42B-30-WW LED-FEST42B-30-PW	○ Warm White	Volts: 10 to 30v DC Lumens: WW: 160lm PW: 165lm	Number of LEDs: 30 - SMD3528 Barrel Type LED 42mm Aqua Signal Type Dimpled Barrel End Festoon	Replaces - 529104 - 529333
	○ Pure White	View Angle: 360° Watts: 1.8w Diameter: 22mm Length: 42mm NON-Polarity Sensitive		

The USCG and other maritime testing agencies currently do not certify individual replacement LED bulbs by themselves or otherwise. At present only complete fixtures with bulbs are tested and certified against the Colreg requirements. While our LED bulbs are the brightest LED bulbs available, the operator of vessel assumes all liability when using this product as a replacement for the original light source.






LED TIP: Colour & Quality of the Light - The colour of light is measured in "Degrees Kelvin". "White" light ranges from 3,000K (warm or towards the red end of the colour spectrum) to 5,000K (cold - towards the blue end of the colour spectrum). LuxOr provides a premium LED package designed to replace your existing halogen, xenon or incandescent bulbs with colour temperatures in the 3,000K range, the warm white end of the colour spectrum. This warm white light brings out the richness of colour and enhances skin tone. While a 5,000K lamp looks brighter (pure white), it will change the colour and appearance of your décor, which may defeat the effect you are trying to achieve.



BAYONET BASE



Note: Bayonet Base Pin Orientation



Single-contact and most double-contact bulbs are Parallel Pin (BA15S/BA15D). Some double-contact bulbs are Indexed Pin (BAY15D).







PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BA9S-6-WW	○ Warm White	Volts: 10 to 14.5v DC	
LED-BA9S-6-BL	● Blue	Lumens: 12-15lm	
		View Angle: 120-150°	
		Watts: 0.24-0.26w	
		Length: 23mm	
		Diameter: 11.5mm	



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BA15S-6-WW	○ Warm White	Volts: 10 to 30v DC	- 1003, 1141, 1156
LED-BA15D-6-WW	○ Warm White	Lumens: 80lm	- 1004, 1142, 1076
LED-BAY15D-6-WW	○ Warm White	View Angle: 120-130°	- 1157
		Watts: 1.0-1.2w	
		Length: 38mm	
		Diameter: 26mm	
		NON-Polarity Sensitive	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BA15S-9-WW	○ Warm White	Volts: 10 to 14.5v DC	- 67, 1416, 1816
LED-BA15S-9-PW	○ Pure White	Lumens: 36-40lm	- 67, 1416, 1816
LED-BA15S-9-BL	● Blue	View Angle: 120-150°	- 67, 1416, 1816
LED-BA15D-9-WW	○ Warm White	Watts: 0.48w	- 68, 90, 1224
LED-BA15D-9-PW	○ Pure White	Length: 34mm	- 68, 90, 1224
LED-BA15D-9-BL	● Blue	Diameter: 19mm	- 68, 90, 1224
LED-BAY15D-9-WW	○ Warm White	NON-Polarity Sensitive	- 68, 90, 1224
			

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BA15S-8-WW	○ Warm White	Volts: 10 to 30v DC	- 67, 1416, 1816
LED-BA15D-8-WW	○ Warm White	Lumens: 120lm	- 68, 90, 1224
LED-BAY15D-8-WW	○ Warm White	View Angle: 360°	
		Watts: 1.2w	
		Length: 37.5mm	
		Diameter: 18.5mm	
		NON-Polarity Sensitive	



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BA15S-13-WW	○ Warm White	Volts: 10 to 30v DC	- 1003
LED-BA15S-13-PW	○ Pure White	Lumens: 195lm	- 1003
LED-BA15D-13-WW	○ Warm White	View Angle: 360°	- 94, 1004
LED-BA15D-13-PW	○ Pure White	Watts: 2.9w	- 94, 1004
LED-BAY15D-13-WW	○ Warm White	Length: 41.5mm	
		Diameter: 18.5mm	
		NON-Polarity Sensitive	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BA15S-18-WW	○ Warm White	Volts: 10 to 30v DC	- 1141
LED-BA15S-18-PW	○ Pure White	Lumens: 270lm	- 1141
LED-BA15D-18-WW	○ Warm White	View Angle: 360°	- 1142, 1204
LED-BA15D-18-PW	○ Pure White	Watts: 3.5w	- 1142, 1204
LED-BAY15D-18-WW	○ Warm White	Length: 54.5mm	- 1157
		Diameter: 23mm	
		NON-Polarity Sensitive	



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
 LED-BA15S-27-WW	○ Warm White	Volts: 10 to 30v DC	- 1156
LED-BA15S-27-PW	○ Pure White	Lumens: 405lm	- 1156
LED-BA15D-27-WW	○ Warm White	View Angle: 360°	- 1076
LED-BA15D-27-PW	○ Pure White	Watts: 4.1w	- 1076
LED-BAY15D-27-WW	○ Warm White	Length: 54.5mm	- 1157
LED-BAY15D-27-PW	○ Pure White	Diameter: 23mm	- 1157
		NON-Polarity Sensitive	

BAYONET BASE



BAYONET BASE BULBS WITH GLASS COVER


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 	LED-BAY15S-9-WW-ENC	○ Warm White	This new LuxOr bayonet bulb offers a compact design and an outer glass envelope to protect the LED bulb from the elements. Available in the BA15S and BA15D base provides the most common bases (1004, 1003, 90, 94) utilized in the marine and RV applications.	- 67, 1416, 1816
LED-BAY15D-9-WW-ENC	○ Warm White	Volts: 10 to 30v DC Watts: 1.5w Lumens: PW: 90lm WW: 80lm		- 67, 1416, 1816
LED-BAY15S-9-PW-ENC	○ Pure White	View Angle: 360°		- 68, 90, 1224
LED-BAY15D-9-PW-ENC	○ Pure White	Dimension		- 68, 90, 1224
LED-BAY15S-9-RD-ENC	● Red	Diameter: 18mm		
LED-BAY15S-9-GR-ENC	● Green	Length: 34mm		
LED-BAY15D-9-RD-ENC	● Red	NON-Polarity Sensitive		
LED-BAY15D-9-GR-ENC	● Green			


BAYONET BASE BULBS WITH PLASTIC COVER



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 	LED-BAY15S-15-WW-ENC	○ Warm White	This new LuxOr bayonet bulb offers an outer plastic envelope to protect the LED bulb from the elements. Available in the BA15S and BA15D base provides the most common bases utilized in the marine and RV applications.	- 1003
LED-BAY15S-15-PW-ENC	○ Pure White	Volts: 10 to 30v DC Watts: 1.4w Lumens: PW: 180lm WW: 170lm		- 1003
LED-BAY15D-15-WW-ENC	○ Warm White	View Angle: 360°		- 94, 1004
LED-BAY15D-15-PW-ENC	○ Pure White	Dimension		- 94, 1004
		Diameter: 25mm		
		Length: 48mm		
		NON-Polarity Sensitive		

BAYONET BASE BULBS WITH PLASTIC COVER IP40


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 	LED-BAY15S-27-WW-ENC	○ Warm White	New LuxOr bayonet base bulb offers an outer plastic envelope to protect the LED bulb from the elements. PC Covers offers IP40 protection.	LED-BAY15S replaces - 1156
LED-BAY15S-27-PW-ENC	○ Pure White	Volts: 10 to 30v DC Watts: 3.0w Lumens: PW: 260lm WW: 240lm		LED-BAY15D replaces - 1076, 1142, 1204
LED-BAY15D-27-WW-ENC	○ Warm White	View Angle: 360°		
LED-BAY15D-27-PW-ENC	○ Pure White	Dimension		
		Diameter: 17mm		
		Length: 52mm		
		NON-Polarity Sensitive		

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
	LED-BAY15D-DC-RG	● Red & Green	1157 LED-BAY15D-DC-RG (Indexed Single Intensity):
		Volts: 10 to 30v DC View Angle: 360° Watts: 4.3w Diameter: 35mm Length: 67.6mm NON-Polarity Sensitive	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	REPLACES
	LED-BAY15D-TC-RGW	● Red, Green & White	1157 LED-BAY15D-TC-RGW (Indexed Single Intensity):
		Volts: 10 to 30v DC View Angle: 360° Watts: 3.9w Diameter: 35mm Length: 67.6mm NON-Polarity Sensitive	

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES	REPLACES
 	LED-BAY15S-12SQ-WW	○ Warm White	Ideal for fixtures with bayonet base bulb mounted horizontally inside fixture and normally use a LED-BAY15S or D replacement bulb but being a 360 degree light, you trap a lot of light in the fixture. This new LuxOr bulb with self adhesive back fastens to the inside top of the fixture. Directs all the light down and out of the fixture.	- 1156
LED-BAY15S-12SQ-PW	○ Pure White	Volts: 10 to 30v DC Lumens: WW: 230lm PW: 240lm		- 1156
LED-BAY15D-12SQ-WW	○ Warm White	View Angle: 120-150° Watts: 2.4w		- 1157
LED-BAY15D-12SQ-PW	○ Pure White	Length: 40mm Width: 40mm NON-Polarity Sensitive		- 1157

SENSOR LED BULB

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
	LED-BAY15D-SL18-PW	○ Pure White	With the bulbs built-in electronics this LuxOr replacement bulb sensing daylight automatically and turns on at dusk and turns off at dawn. No special wiring or switches are needed - just simply replace your bulb.
		Volts: 10 to 30v DC Lumens: 271lm View Angle: 360° Watts: 2.4w Diameter: 23.5mm Length: 53.5mm	LED-BAY15D-SL18-PW (Indexed Single Intensity): 1157





FLOOD LIGHTS / DRIVING LIGHTS SPREADER LIGHTS


HIGHLIGHT YOUR RECREATIONAL EXPERIENCE


For the times when sun up to sun down isn't long enough to enjoy your favourite outdoor activities LuxOr Marine & RV Products provides exceptional products that deliver supreme light output and durability that will highlight your recreational experience.


FLOOD LIGHTS / DRIVING LIGHTS / SPREADER LIGHTS


PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SL-18-F-WH	Flood	White	Volts: 10 to 30v DC Lumens: 1,260lm Watts: 18w AMP Draw at 12v DC: 1.5 LEDs: 6	SL-18 Series - Low Profile LED - Housing provides excellent heat dissipation and die cast lens frame. The clear lens is made in polycarbonate, for durability, with a choice of specialized optics including spot or flood type distribution pattern. Vibration free mounting bracket with stainless steel hardware combined with high performance silicone gasketing system ensures an IP68 enclosure rating for waterproof, dustproof, and shockproof. Up to 30,000 hours plus lifespan.
LED-SL-18-F-BL	Flood	Black		

PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SL-20-D-WH	Diffuse	White	Volts: 10 to 30v DC Lumens: 1,440lm Watts: 20w AMP Draw at 12v DC: 1.67 LEDs: 4	SL-20 Series - Performance LED - Housing provides excellent heat dissipation and die cast lens frame. Choice of specialized optics include diffuse, spot or flood type distribution patterns, with lens made in polycarbonate. Vibration free mounting bracket with stainless steel hardware combined with high performance silicone gasketing system ensures an IP68 enclosure rating for waterproof, dustproof, and shockproof. Up to 30,000 hours plus lifespan.
LED-SL-20-S-WH	Spot	White		
LED-SL-20-F-WH	Flood	White		
LED-SL-20-F-BL	Flood	Black		

PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SL-30-D-WH	Diffuse	White	Volts: 10 to 30v DC Lumens: 3,600lm Watts: 30w AMP Draw at 12v DC: 2.5 LEDs: 6	SL-30 Series - Performance LED - Housing provides excellent heat dissipation and die cast lens frame. Choice of specialized optics include diffuse, spot or flood type distribution patterns, with lens made in polycarbonate. Vibration free mounting bracket with stainless steel hardware combined with high performance silicone gasketing system ensures an IP68 enclosure rating for waterproof, dustproof, and shockproof. Up to 30,000 hours plus lifespan.
LED-SL-30-S-WH	Spot	White		
LED-SL-30-F-WH	Flood	White		

PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SLB-36-C-WH	Combo	White	Volts: 10 to 30v DC Lumens: 2,640lm Watts: 36w AMP Draw at 12v DC: 3.0 LEDs: 12	SLB-36 Series - LED Light Bars - High quality die cast aluminum, which provides excellent heat dissipation, these outdoor rugged construction floods are available in a white or black corrosion resistant paint finish. Your choice of specialized optics includes spot, flood and combo spot/flood type distribution patterns. Silicone gasket ensures a positive seal and waterproof IP67 rating. Up to 30,000 hours plus lifespan.
LED-SLB-36-S-WH	Spot	White		
LED-SLB-36-F-WH	Flood	White		

PART NUMBER	OPTICS	HOUSING	SPECIFICATIONS	FEATURES
 LED-SLB-60-C-WH	Combo	White	Volts: 10 to 30v DC Lumens: 4,200lm Watts: 60w AMP Draw at 12v DC: 4.0 LEDs: 20	SLB-60 Series - LED Light Bars - High quality die cast aluminum, which provides excellent heat dissipation, these outdoor rugged construction floods are available in a white or black corrosion resistant paint finish. Your choice of specialized optics includes spot, flood and combo spot/flood type distribution patterns. Silicone gasket ensures a positive seal and waterproof IP67 rating. Up to 30,000 hours plus lifespan.
LED-SLB-60-S-WH	Spot	White		
LED-SLB-60-F-WH	Flood	White		

PART NUMBER	TUBE BAR SIZE	FEATURES
 LED-SL-MB-175	1.75"	SL-MB Series - Bar Mounting Kit CNC Machined Aluminum 6061T6 billet. Anodized black finish. Package is 2 (two) brackets - one for each end. Positional adjustment of 1" allows for flexible mounting requirements.
LED-SL-MB-200	2.0"	
LED-SL-MB-250	2.5"	

Add Style and Energy Efficiency with Luxor LED Strip Lighting

Flexible Waterproof LED Strip Lighting

IP65



3M Adhesive Backing



Flexible Waterproof LED Strip Lighting

IP67



Easy Install Mounting Straps



Rigid Aluminum LED Strip Lighting






Easy Snap-in Installation Clips





LED Strip Lighting offers the perfect solution for creating energy efficient, stylish task, accent and mood lighting. Strip lights are discreet and flexible and can be mounted virtually anywhere. IP65 for indoors and IP67 rated with extensive UV protection for outdoors makes these strip LED's perfect for boating applications. Add the optional IR Controller and produce multiple colours (RGB - red, green blue combinations), control brightness and create special effects.


FLEXIBLE WATERPROOF STRIP LIGHTING


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-F565-2M-PW	○ Pure White	Volts: 12v DC	Flexible, IP65 rated, indoor, encased in a flexible epoxy resin. Thin diameter, extremely low profile. Ready to connect to 12 volt DC power source. High Intensity, Superior Lumen Output. Cut to the perfect length at 4" intervals 7.2 Watt / Meter. Available in 2-metre or 5-metre roll  Lumens quoted based on Pure White
LED-F565-2M-BL	● Blue	LEDs: 30/m	
LED-F565-2M-RGB	● RGB	View Angle: 120°	
LED-F565-5M-PW	○ Pure White	Watts: 7.2w/m	
LED-F565-5M-BL	● Blue	Length: 2m or 5m	
LED-F565-5M-RGB	● RGB		

PART NUMBER	FEATURES
 LED-RGB-CONTROLLER	<p>RGB Multifunction Controller with RF remote up to 10 metres. Choose light pattern, speed and brightness of 20 colours (RGB). Indoor only (IP20).</p> <p>The LuxOr controller is supplied with RF remote control. This premium RF controller can be installed in a remote or enclosed location and allows you to control the lighting functions without having a line of site to the controller. This is a premium controller while many other lower cost type controls are Infra Red (IR) which requires the remote to be pointed at the controller to adjust your lighting thus it must be exposed. The LuxOr controller also includes control buttons on the controller should the remote be displaced. The RF remote controller allows you to choose your desired lighting pattern.</p> <p>Note RGB controller must be mounted in a dry location.</p>



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-F567-2M-PW	○ Pure White	Volts: 12v DC	Flexible, IP67 rated, outdoor, encased in UV resistant clear silicone jacket. Ready to connect to 12 volt DC power source. Easy-install clips, low profile, cut to length at 4" intervals w/ end cap. High Intensity, Superior Lumen Output. Cut to the perfect length at 4" intervals 7.2 Watt / Metre. Available in 2-metre or 5-metre roll.  Lumens quoted based on Pure White
LED-F567-2M-BL	● Blue	LEDs: 30/m	
LED-F567-2M-RGB	● RGB	View Angle: 120°	
LED-F567-5M-PW	○ Pure White	Watts: 7.2w/m	
LED-F567-5M-BL	● Blue	Length: 2m or 5m	
LED-F567-5M-RGB	● RGB		
LED-F567-STRAP			

PONTOON PACKAGE

PART NUMBER	LIGHT COLOUR	FEATURES
 LED-FS65-2x8M-BL	● Blue 2 pcs 8m Long	<p>Package includes 2 x IP65 weatherproof Blue (Output Colour) flexible lighting strips 8 meters in length with 3M Self-Adhesive backing. Can be cut in the field to length if required.</p> <p>Flexible IP65 rated outdoor strip lighting. Encased LED's offer an extremely low profile, which allows the installer to hide the light source for a visually unique illuminated surface. Utilizing 5050SMD LED's LuxOr's flexible weatherproof strip lighting offers superior lumen output.</p> <p>LuxOr's IP65 rated flexible lighting strips are supplied with a 3M Self-Adhesive backing, which allows the installation to be simple, and tool free.</p>

PART NUMBER	LIGHT COLOUR	FEATURES
 LED-FS65-2x8M-RGB	● RGB 2 pcs 8m Long and Premium RF (Radio Frequency) Controller	<p>Package includes 2 x IP65 weatherproof RGB (Red, Green Blue Output Colour) flexible lighting strips 8 meters in length with 3M Self-Adhesive backing, which allows the installation to be simple, and tool free. Can be cut in the field to length if required. Flexible IP65 rated outdoor strip lighting. Encased LED's offer an extremely low profile, which allows the installer to hide the light source for a visually unique illuminated surface. Utilizing 5050SMD LED's LuxOr's flexible weatherproof strip lighting offers superior lumen output.</p> <p>Also included is the LED-RGB-CONTROLLER RF multifunction RF (Radio Frequency) remote controller.</p>

RIGID UNDER-CABINET LIGHT STRIPS

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-UCS-12-WW	○ Warm White	Volts: 12v DC	Perfect for indoor accent or confined area lighting. Quiet, flicker-free, aluminum heat sink body ensures cool operation. Easy-install snap-in clips, low profile. Warm White or Cool White LED. Lasts over 40,000 hours. Sealed metal housing, sealed optics. Includes switch  Lumens quoted based on Pure White
LED-UCS-12-PW	○ Pure White	Lumens: 234/ft	
LED-UCS-18-WW	○ Warm White	View Angle: 120°	
LED-UCS-18-PW	○ Pure White	Watts: 4.3w/ft	
LED-UCS-24-WW	○ Warm White	Length: 12"/18"/24"	
LED-UCS-24-PW	○ Pure White	Width: 14.5mm	

SLIM LINE RIGID UNDER-CABINET LIGHT STRIPS

Luxor Marine offers a Slim Line LED luminaire ideal for under cabinet or accent valance lighting. These fixtures are an ideal replacement for old fluorescent lighting used in kitchens, bathroom or salons. The fixtures are only 8mm thick and offer either a low profile or adjustable mounting clips as standard.

The LED-SLM-12-TD is supplied with a 3 level touch dimmer. 100% - 60% - 30% - Off. Also included are a 12v DC power cable for connecting to 12 V DC supply and low profile mounting clips.









The LED-SLM-12-ILE is the 300 mm long fixture supplied with an extender bracket which allows the customer to simply plug into the first fixture to extend fixture to fixture. There is a maximum limitation of 3 light bars end to end.

The LED-SLM-90-CC is a 90° connector which allows for the fixtures to be mounted in a corner 90° configuration with a simple plug in connector.


The LED-SLM-LC-12VDC is a 0.5-meter power cable, which allows for an easy connection to a 12v DC supply at one end and slide in connector for the fixture at the other end.

The LED-SLM-PP-120VAC-12VDC is a 1.0 meter link cable which allows the installer to link two 12 inch fixtures together with a cable so the fixtures can be spaced further apart up to 1.0 meter. There is a maximum limitation of 3 light bars end to end.





PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-SLM-12-WW-TD	Warm White	Volts: 12v DC Lumens: 280lm View Angle: 120° Watts: 4w Length: 300mm Width: 8mm IP20 Rated	Includes Slim Line Fixture, Touch Dimmer Power Cable and Mounting Brackets
			
PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
LED-SLM-12-WW-ILE	Warm White	Volts: 12v DC Lumens: 280lm View Angle: 120° Watts: 4w Length: 300mm Width: 8mm IP20 Rated	Includes Slim Line Fixture, End to End Extension Connector and Mounting Brackets
			
PART NUMBER	FEATURES		
LED-SLM-90-CC	Right Angle 90° Corner bracket		
			
PART NUMBER	FEATURES		
LED-SLM-LC-12VDC	0.5 Metre Power Cable 12v DC		
			
PART NUMBER	FEATURES		
LED-SLM-PP-120VAC-12VDC	One Metre Link Cable Connector		
			

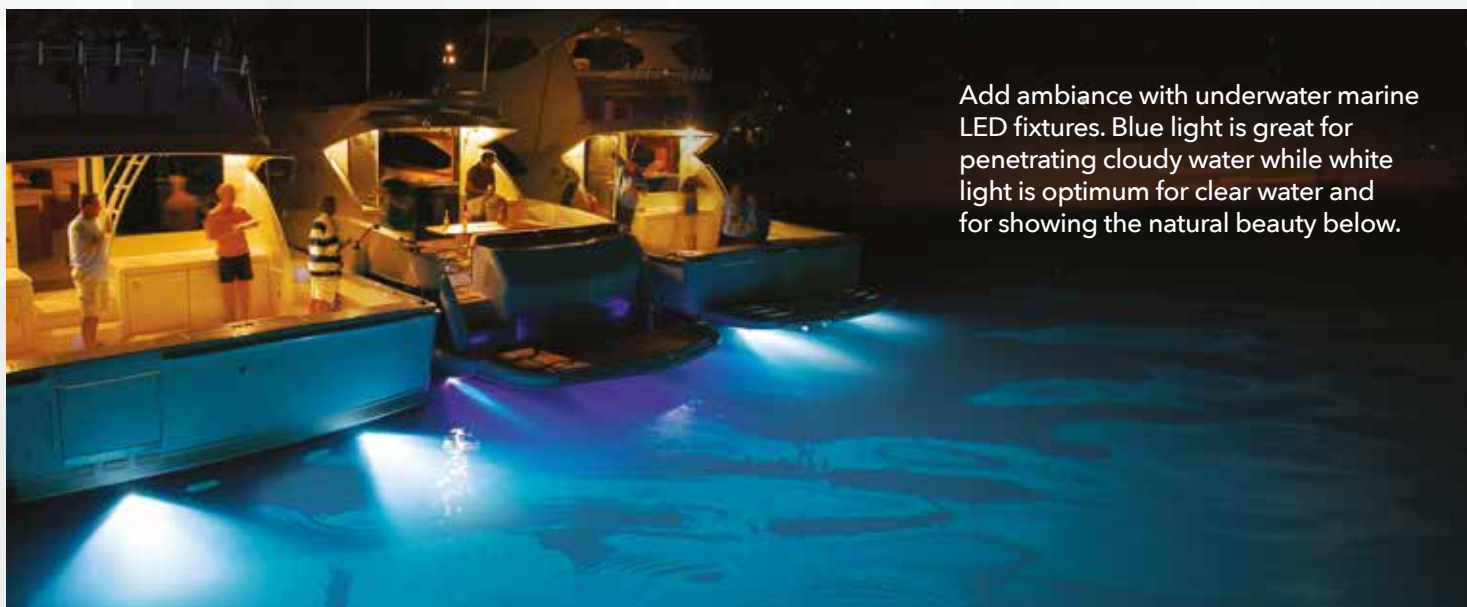
UNDERWATER MARINE LED TRANSOM FIXTURES






Add ambiance with underwater marine LED fixtures. Blue light is great for penetrating cloudy water while white light is optimum for clear water and for showing the natural beauty below.


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-SUWL-6-3-W LED-SUWL-6-3-BL	<input type="radio"/> White <input checked="" type="radio"/> Blue	Volts: 8 to 28v DC Lumens: W: 900lm BL: 270lm View Angle: 30° Watts: 18w LEDs: 6 x 3 watts	8 to 28 Volt DC Fused Input w/ 5ft Waterproof Cable Constant Current Power Regulator for constant light output. Rugged 316 Marine Grade Stainless Steel Construction Cree brand LEDs, IP68 Waterproof Rating, CE and RoHs Approved 40,000 Hour Bulb Life, 1-Year Warranty

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-6-3-W LED-RUWL-6-3-BL	<input type="radio"/> White <input checked="" type="radio"/> Blue	Volts: 8 to 28v DC Lumens: W: 900lm BL: 270lm View Angle: 30° Watts: 18w LEDs: 6 x 3 watts	8 to 28 Volt DC Fused Input w/ 5ft Waterproof Cable Constant Current Power Regulator for constant light output. Rugged 316 Marine Grade Stainless Steel Construction Cree brand LEDs, IP68 Waterproof Rating, CE and RoHs Approved 40,000 Hour Bulb Life, 1-Year Warranty


PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-9-3-W LED-RUWL-9-3-BL	<input type="radio"/> White <input checked="" type="radio"/> Blue	Volts: 8 to 28v DC Lumens: W: 1,750lm BL: 450lm View Angle: 30° Watts: 27w LEDs: 9 x 3 watts	8 to 28 Volt DC Fused Input w/ 5ft Waterproof Cable Constant Current Power Regulator for constant light output. Rugged 316 Marine Grade Stainless Steel Construction Cree brand LEDs, IP68 Waterproof Rating, CE and RoHs Approved 40,000 Hour Bulb Life, 1-Year Warranty

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-50-BW Operation: An abrupt OFF/ON toggle of your standard (SPST) switch allows lights to transition through various light output modes 1 - Cross-Colour Fade - gently undulating colour mix, 2 - On, Blue 3 - On, White, 4 - On, White and Blue, 5 - Flashing, two colour	<input checked="" type="radio"/> Blue - White	Volts: 9-32v DC Lumens: 630-2,148lm View Angle: 120° Watts: 50w LEDs: 10 x 5 watt Cree Diameter: 96mm Depth: 31mm	Multi Function Light Output Blue/White Cross Fade, Blue, White, Blue & White and Blue White Strobe. 9 to 32 Volt DC Fused Input with 4ft sealed Cable Rugged 316 Marine Grade Stainless Steel Housing Built in internal driver powers the Cree LED chips IP68 Waterproof Rating Perfect for Bright Underwater Lighting 120 Degree Emitting Angle 1-Year Warranty

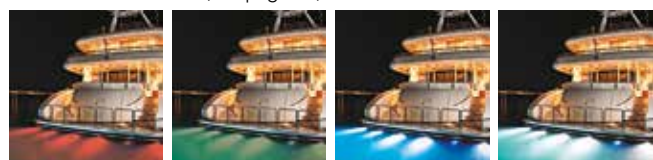

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-60-W LED-RUWL-60-BL LED-RUWL-60-DC LED-RUWL-60-RGB* *requires Waterproof RGB Controller LED-RGB-612-CONT-RF or LED-RGB-612-CONT-BT (see page 18)	○ White ● Blue ● Blue, White ● RGB - Red, Green & Blue	Volts: W: 10 to 30v DC BL: 10 to 30v DC DC: 10 to 30v DC RGB: 12v DC Lumens: PW: 2,958lm BL: 720lm DC: 360/1,480lm RGB: 725-2,850lm View Angle: 140° Watts: 60w LEDs: 12 x 5 watt Cree Diameter: 94mm Depth: 17mm	9 to 32v DC input with 4 foot sealed cable. Built in internal driver powers the Cree LED chips to provide super bright underwater lighting. Rugged 316L Marine Grade Stainless Steel housing is sealed to offer an IP68 waterproof rating. CE certification. 40,000 Hour Bulb Life, 1-Year Warranty. LED-RUWL-60-DC Dual Colour light requires a double pole switch or two switches to toggle between blue and white light colours.
 representation of RGB lighting			



PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-120-W LED-RUWL-120-BL LED-RUWL-120-DC LED-RUWL-120-RGB* *requires Waterproof RGB Controller LED-RGB-612-CONT-RF or LED-RGB-612-CONT-BT (see below)	○ White ● Blue ● Blue, White ● RGB - Red, Green & Blue	Volts: W: 10 to 30v DC BL: 10 to 30v DC DC: 10 to 30v DC RGB: 12v DC Lumens: W: 5,900lm BL: 1,440lm DC: 720/2,950lm RGB: 1,450-5,700lm Watts: 120w LEDs: 24 x 5 watt Cree Length: 128mm Width: 80mm Depth: 17mm	9 to 32v DC input with 4 foot sealed cable. Built in internal driver powers the Cree LED chips to provide super bright underwater lighting. Rugged 316L Marine Grade Stainless Steel housing is sealed to offer an IP68 waterproof rating. CE certification. 40,000 Hour Bulb Life, 1-Year Warranty. LED-RUWL-120-DC Dual Colour light requires a double pole switch or two switches to toggle between blue and white light colours.
 representation of Dual Colour lighting			



BUNDLES

PART NUMBER	LIGHT COLOUR	SPECIFICATIONS	FEATURES
 LED-RUWL-60-RGB-BNDL includes 2 fixtures and one LED-RGB-612-CONT-RF waterproof RGB controller	● RGB - Red, Green & Blue	Volts: 12v DC Lumens: 725-2,850lm View Angle: 140° Watts: 60w LEDs: 12 x 5 watt Cree Diameter: 94mm Depth: 17mm	9 to 32v DC input with 4 foot sealed cable. Built in internal driver powers the Cree LED chips to provide super bright underwater lighting. Rugged 316L Marine Grade Stainless Steel housing is sealed to offer an IP68 waterproof rating. CE certification. 40,000 Hour Bulb Life, 1-Year Warranty.
 LED-RUWL-120-RGB-BNDL includes 2 fixtures and one LED-RGB-612-CONT-RF waterproof RGB controller	● RGB - Red, Green & Blue	Volts: 12v DC Lumens: 1,450-5,700lm Watts: 120w LEDs: 24 x 5 watt Cree Length: 128mm Width: 80mm Depth: 17mm	9 to 32v DC input with 4 foot sealed cable. Built in internal driver powers the Cree LED chips to provide super bright underwater lighting. Rugged 316L Marine Grade Stainless Steel housing is sealed to offer an IP68 waterproof rating. CE certification. 40,000 Hour Bulb Life, 1-Year Warranty.

WATERPROOF RGB CONTROLLER



LED-RGB-612-CONT-RF
LED-RGB-612-CONT-BT

Radio Frequency
Bluetooth

215w 12v DC
360w 12v DC

Waterproof 12v DC RGB controller has an input supply lead and 2 output supply leads to provide for a quick and easy installation.
Available as a Radio Frequency (RF) or Bluetooth (BT) controller.

COMPACT LOW PROFILE UNDERWATER LIGHT



LED-SUWL-30-W
LED-SUWL-30-BL
LED-SUWL-30-RGB*
*requires Waterproof RGB
Controller LED-RGB-612-CONT-RF
or LED-RGB-612-CONT-BT
(see page 18)

○ White
● Blue
● RGB - Red,
Green & Blue

SPECIFICATIONS
Volts: W: 10 to 30v DC
BL: 10 to 30v DC
RGB: 12v DC
Lumens: WW: 1,400lm
BL: 278lm
RGB: 270-1,400lm
View Angle: 120°
Watts: 30w
LEDs: 6 x 5 watts
Dimension
Length: 125mm
Width: 44mm
Depth: 12.5mm

FEATURES
10 to 30v DC input with 4 foot sealed cable. Built in internal driver with over temperature protection powers the Cree LED chips to provide super bright underwater lighting.
Rating: IP68
Housing: 316L Marine Grade Stainless Steel
Lens: Polycarbonate
CE certification.
40,000 Hour Bulb Life. 1-Year Warranty

STAINLESS STEEL UNDERWATER DRAIN PLUG LED W/ WATERPROOF QUICK DISCONNECT



LED-DPUWL-27HP-W-SS
LED-DPUWL-27HP-BL-SS
LED-DPUWL-27HP-RGB-SS

○ White
● Blue
● RGB - Red,
Green & Blue

SPECIFICATIONS
Volts: W: 10 to 30v DC
BL: 10 to 30v DC
RGB: 12v DC
Lumens: PW: 1,620lm
BL: 200lm
RGB: 700lm
View Angle: 120°
Watts: 27w
LEDs: 9 x 3 watts

FEATURES
Features Luxor designed waterproof quick disconnect for easy removal and storage.
Simply screw into the 1/2" threaded entry and wire.
Cree LED's produce Intense 1,620 Lumen output in white with a viewing angle of 120°.
Constructed with a Heavy duty 316L Stainless Steel housing and a polycarbonate lens.
Built-in 10 to 30 volt DC driver and automatic overheat shutdown protection.
RGB light includes Radio Frequency (RF) / Bluetooth (BT) controller.
IP68 Waterproof Rating CE Certified.
Exclusive to LuxOr Marine & RV.

waterproof
quick disconnect



LED-DPUWL-45HP-W-SS
LED-DPUWL-45HP-BL-SS
LED-DPUWL-45HP-RGB-SS

○ White
● Blue
● RGB - Red,
Green & Blue

SPECIFICATIONS
Volts: W: 10 to 30v DC
BL: 10 to 30v DC
RGB: 12v DC
Lumens: PW: 2,700lm
BL: 500lm
RGB: 1,000lm
View Angle: 120°
Watts: 45w
LEDs: 9 x 5 watts

FEATURES
Highest wattage drain plug light available.
Features Luxor designed waterproof quick disconnect for easy removal and storage.
Simply screw into the 1/2" threaded entry and wire.
Cree LED's produce Intense 2,700 Lumen output in white with a viewing angle of 120°.
Constructed with a Heavy duty 316L Stainless Steel housing and a polycarbonate lens.
Built-in 10 to 30 volt DC driver and automatic overheat shutdown protection.
RGB light includes Radio Frequency (RF) / Bluetooth (BT) controller.
IP68 Waterproof Rating CE Certified.
Exclusive to LuxOr Marine & RV.

waterproof
quick disconnect

NOTE: Luxor Marine underwater lights publishes the Lumen light output of the underwater light in actual lumens not theoretical Raw or Bead lumens of the LED chips used in the fixture.

PREVENT SCRATCHES & SCUFF MARKS



Are you tired of the scratches and scuff marks from rubbing fenders?

LuxGuard Gelcoat Protector is the solution!



LuxGuard

GELCOAT PROTECTOR

The clear film provides excellent durability against scratches and wear marks from fenders.



AVAILABLE IN A VARIETY OF SIZES


FENDER SIZE	SHEET SIZE	QUANTITY	PART NUMBER
8" x 20"	11.5" x 16"	2 pack	LG-GP-11x16-2
8" x 20"	11.5" x 16"	4 pack	LG-GP-11x16-4
10" x 26"	14.5" x 20"	2 pack	LG-GP-14x20-2
10" x 26"	14.5" x 20"	4 pack	LG-GP-14x20-4
12" x 34"	16" x 23.5"	2 pack	LG-GP-16x23-2
12" x 34"	16" x 23.5"	4 pack	LG-GP-16x23-4

Simple DIY Installation

Installation Instructions




Spray area with alcohol based solution.




Wipe area dry using a lint free towel/cloth.




Spray application area with soapy water solution.




Lay film on a flat surface and peel off backing of protector sticky side up.



Spray sticky side of film with alcohol based solution.



Place film on hull and position it into place.



Carefully squeegee all water out from behind the film.
Let cure for 3 to 5 days.

LUXGUARD GELCOAT PROTECTOR FILM

Protect your gelcoat (coloured or white) from scratching or scuffing from rubbing fenders during docking or when rafting to other boats with LuxGuard clear Gelcoat Protector film.

The clear protectors when applied are virtually invisible to the eye thus showing your natural coloured hull surface.

Simple DIY installation.



PART NUMBER	QUANTITY	PROTECTOR SIZE	FENDER SIZE
LG-GP-11x16-2	2 Pack	11.5" x 16"	8" x 20"
LG-GP-11x16-4	4 Pack	11.5" x 16"	8" x 20"
LG-GP-14x20-2	2 Pack	14" x 20"	10" x 26"
LG-GP-14x20-4	4 Pack	14" x 20"	10" x 26"
LG-GP-16x23-2	2 Pack	16" x 23.5"	12" x 34"
LG-GP-16x23-4	4 Pack	16" x 23.5"	12" x 34"

LUXGUARD MAX SPIDER & ANT KILLER

A water-based insecticide that's safe to use on Boats & RV's. Long lasting and effective control against Spiders, Brown Dog Ticks, Earwigs, Fleas, Ants, and Cockroaches.



PART NUMBER
LG-SPDR-1L

FEATURES

- Water-Based Insecticide for Indoor & Outdoor Usage
- Lemongrass Scent
- No Sticky Residue
- Non Foamy, Non Greasy
- Long Lasting
- Ready-to-Use
- Non-Flammable

Add Ambiance with Underwater Marine LED Fixtures



Available in Bright White or Blue

Blue light is great for penetrating cloudy water while white light is optimum for clear water and for showing the natural beauty below.

Only a small hole (1/4") is required to pass the wire thru the hull. Three stainless screws are required to secure the light to the hull.

Due to their power, the lamps must be immersed in water.

Luxor Marine & RV Products

Division of 2457925 Ontario Ltd.
P.O. Box 20062, Pioneer Park P.O.
Kitchener, ON N2P 2B4

519-240-2882
sales@luxormarine-rv.ca



Your Canadian Source for LED Lighting

April 2022

www.luxormarine-rv.ca